

Xiltek

Commercial Refrigeration Equipment

Product Catalog



XF Series

Solid Door Reach-In Freezers

MODEL #XF-1-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid door has stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf raises product to a higher level for easy access.

SHELVING

3 gray epoxy-coated steel shelves included.

Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XF Series REACH-IN FREEZER

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing door with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of (-8)°F - (-1)°F
- 3 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/2 HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XF-1-HC	1	3	29 736	32 1/4 818	82 1/4 2095	23 650	1/2+	115/60/1	7.1	5-15P 

XF Series

Solid Door Reach-In Freezers

MODEL #XF-1-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	29"W x 32¼"D x 82½"H
Interior Dimensions	24⅜"W x 27⅞"D x 60¼"H
Net Volume	23 cu. ft.
Net Weight	282 lb.
Gross Weight	321 lb.
Packaging Dimensions	30¼"W x 34"D x 84½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/2

Electrical

Voltage	115
Amps	7.1
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

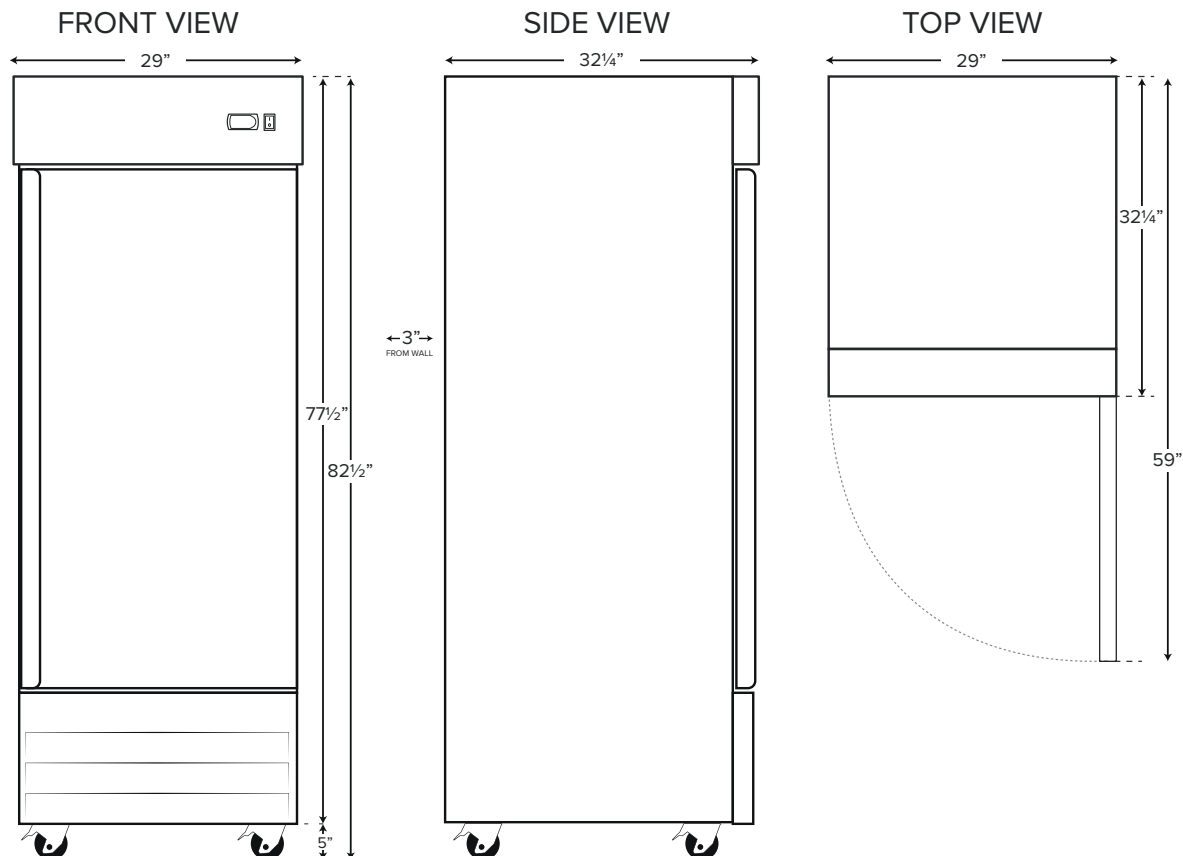

NEMA 5-15P

XF Series

Solid Door Reach-In Freezers

MODEL #XF-2-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid door has stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf raises product to a higher level for easy access.

SHELVING

3 gray epoxy-coated steel shelves included.

Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XF Series REACH-IN FREEZER

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing doors with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of (-8)°F - (-1)°F
- 6 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1 HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XF-2-HC	2	6	54 1371	32 1/4 818	82 1/4 2095	47 1321	1	115/60/1	10.7	5-15P 

XF Series

Solid Door Reach-In Freezers

MODEL #XF-2-HC

TECHNICAL DATA



Dimensions

Exterior Dimensions	54"W x 32¼"D x 82½"H
Interior Dimensions	49⅜"W x 27⅞"D x 60¼"H
Net Volume	47 cu. ft.
Net Weight	448 lb.
Gross Weight	530 lb.
Packaging Dimensions	56¼"W x 34¾"D x 85½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1

Electrical

Voltage	115
Amps	10.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

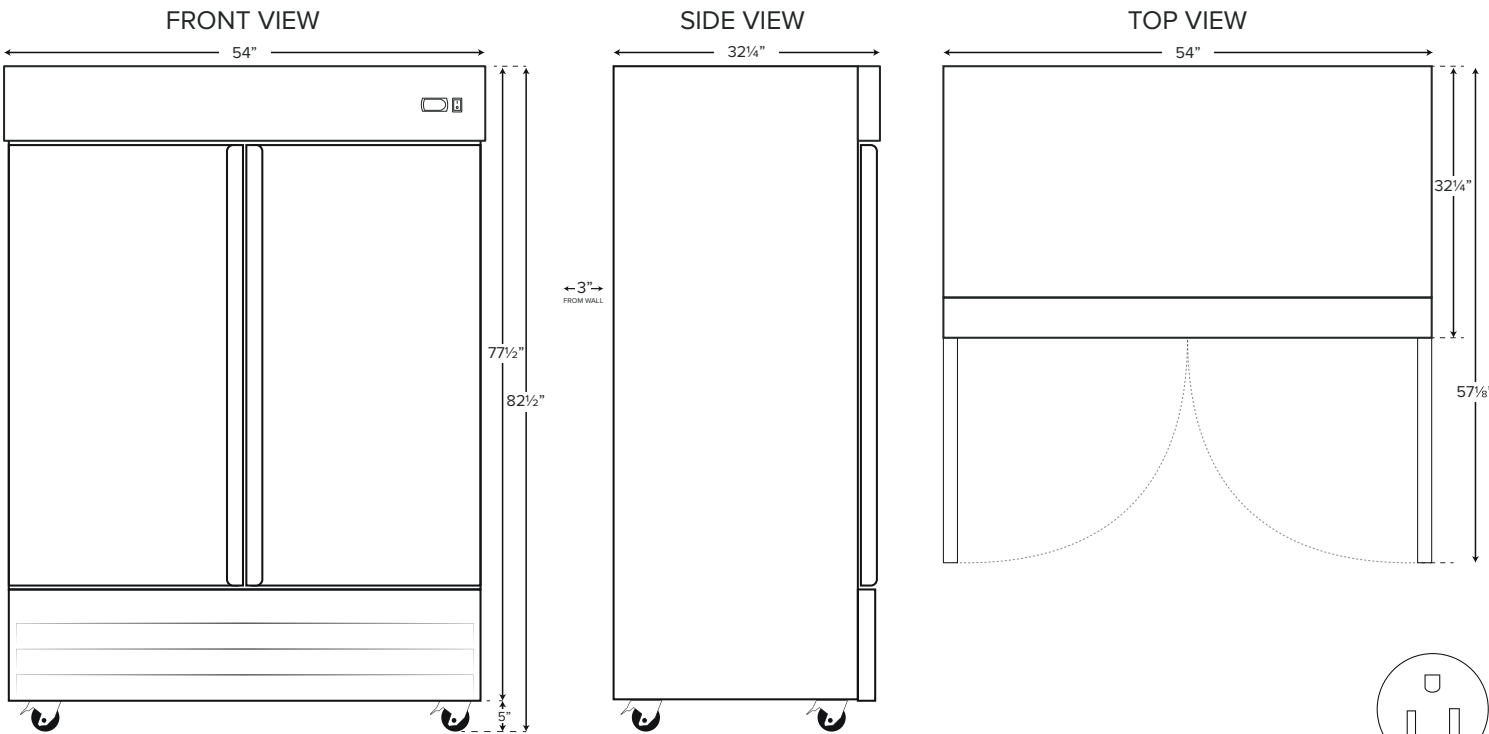

NEMA 5-15P

XF Series

Solid Door Reach-In Freezers

MODEL #XF-3-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid doors have stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

9 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XF Series REACH-IN FREEZER

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing doors with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of (-8)°F - (-1)°F
- 9 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1 ¼ HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XF-3-HC	3	9	80 9/10 2054	32 1/4 818	82 1/4 2095	72 2040	1 1/4	115/60/1	12	5-20P 

XF Series

Solid Door Reach-In Freezers

MODEL #XF-3-HC

Xiltek

Dimensions

Exterior Dimensions	80 ⁷ / ₈ "W x 32 ¹ / ₄ "D x 82 ¹ / ₂ "H
Interior Dimensions	76 ¹ / ₄ "W x 27 ¹ / ₈ "D x 60 ¹ / ₄ "H
Net Volume	72 cu. ft.
Net Weight	615 lb.
Gross Weight	693 lb.
Packaging Dimensions	83 ¹ / ₂ "W x 34 ³ / ₄ "D x 85 ¹ / ₂ "H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 20 ⁷ / ₈ "W x 25 ³ / ₁₆ "D & (3) 22 ¹ / ₈ "W x 25 ³ / ₁₆ "D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1 ¹ / ₄

Electrical

Voltage	115
Amps	12
Hz	60
Phase	1
Plug Type	NEMA 5-20P
Electrical Cord Length	96"

PLAN VIEW

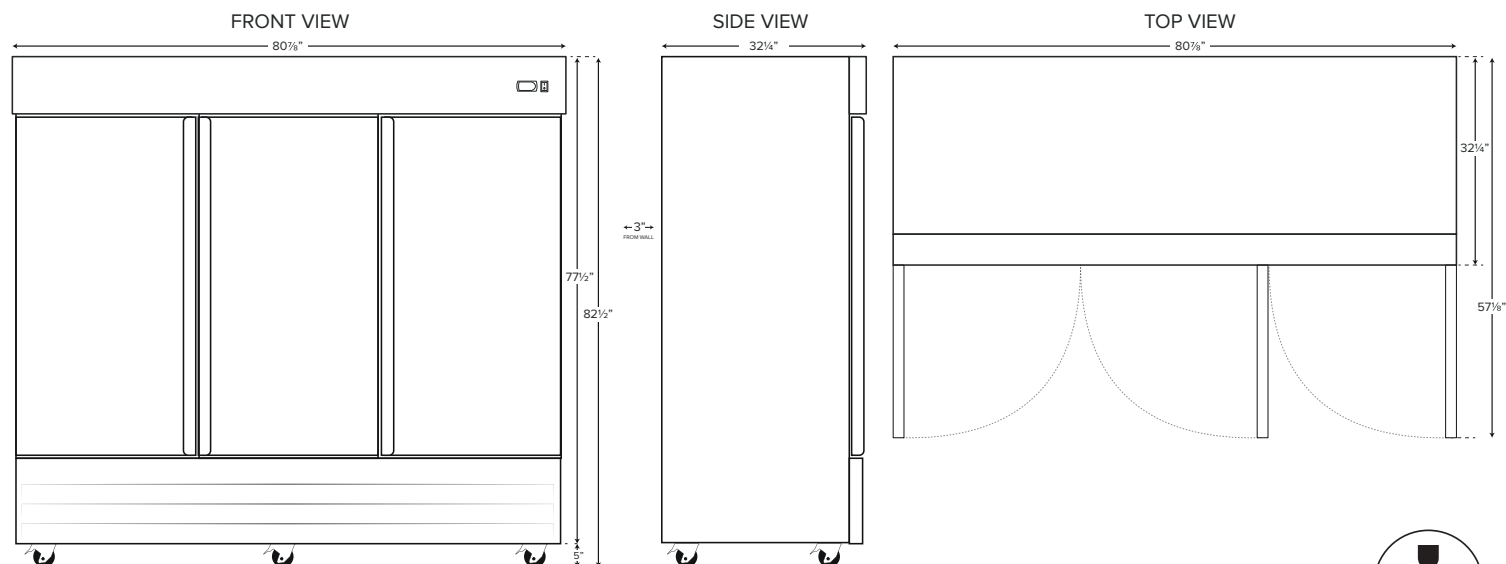

NEMA 5-20P

XDC Series

Deli Case



MODEL #XDC-92SS-HC

XDC SERIES - DELI CASE

For merchandising and storage of deli meats and cheeses, and grab and go sandwiches and salads.

CABINET CONSTRUCTION

Stainless steel exterior with aluminum interior. Interior features stainless steel floor to resist corrosion and rust from the inevitable spill or leak.

Curved, front glass pane provides product visibility for merchandising.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

DOORS

Rear doors slide open for easy placement and removal of products.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

Gravity coils help create high-humidity environment to prevent meat from drying out.

SHELVING

4 epoxy-coated steel shelves included. Each accommodates up to 132 lb. to best suit your needs.

MODEL FEATURES

Intuitive, easy to read digital controls. Auto-defrost function simplifies maintenance and servicing.

Interior LED lighting illuminates product for a bright, effective display.

SPECIAL FEATURES

- Front glass pane for merchandise visibility
- 4 epoxy-coated shelves for organized display
- 11.6 cu. ft. of refrigerated storage space
- Foamed-in-place polyurethane insulation
- Digital temperature controls hold at 33-40°F
- Environmentally-friendly R290 refrigerant
- Type 430 stainless steel exterior
- Painted aluminum and 304 type stainless steel interior
- Auto defrost feature simplifies maintenance
- 1/3 hp compressor



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDC-92-HC	2	3	36 920	32 1/2 825	47 7/8 1089	12 330	1/3	115/60/1	4.7	5-15P 

XDC Series

Deli Case



TECHNICAL DATA

Dimensions

Exterior Dimensions	36¼"W x 32½"D x 47 7⁄8"H
Interior Dimensions	32¼"W x 26¾"D x 26¾"H
Net Volume	11.6 cu. ft.
Net Weight	260 lb.
Gross Weight	298 lb.
Packing Dimensions	40¼"W x 36¼"D x 48¾"H

Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Painted Aluminum and Type 304 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
# of Doors	2
Door Type	Sliding
# of Shelves	(2) 29"W x 22½"D and (2) 15⅛"W x 24¾"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	132 lb.


Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/3
BTU/Hr	743

Electrical

Voltage	115
Amps	4.68
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

PLAN VIEW

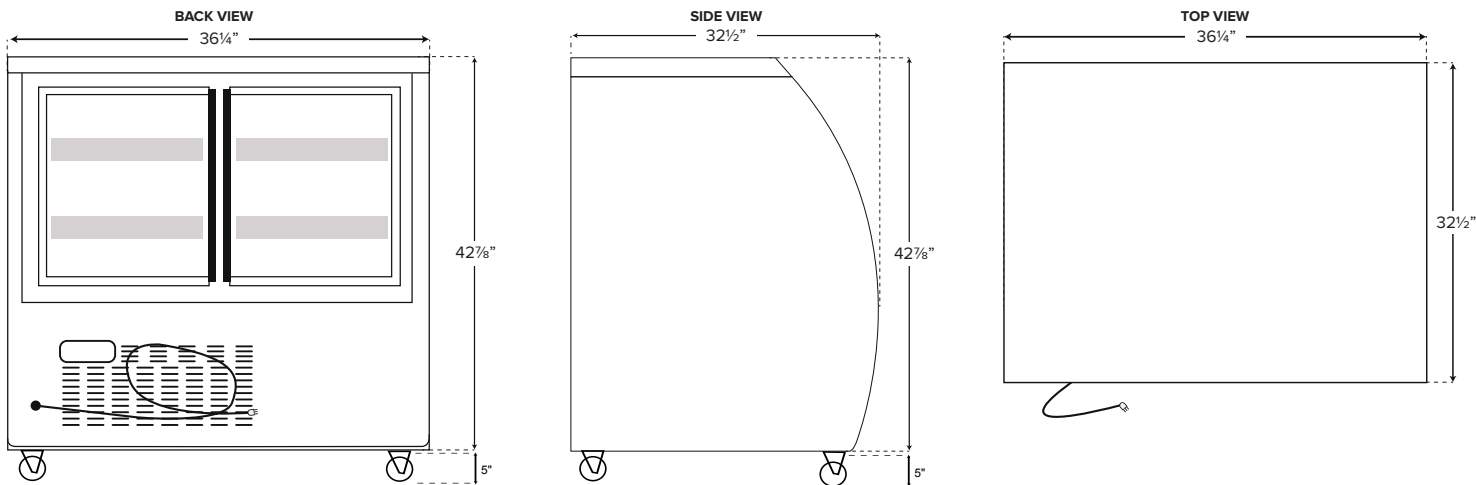

NEMA 5-15P

XDC Series

Deli Case

Xiltek

MODEL #XDC-120-SS-HC

XDC SERIES - DELI CASE

For merchandising and storage of deli meats and cheeses, and grab and go sandwiches and salads.

CABINET CONSTRUCTION

430 type stainless steel exterior with aluminum interior. Interior features stainless steel floor to resist corrosion and rust from the inevitable spill or leak.

Curved, front glass pane provides product visibility for merchandising.

Interior LED lighting illuminates product for a bright, effective display.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

DOORS

Rear doors slide open for easy placement and removal of products.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

6 epoxy-coated steel shelves included. Each accommodates up to 90 lb. to best suit your needs.

MODEL FEATURES

Intuitive, easy to read digital controls. Auto-defrost function simplifies maintenance and servicing.

Gravity coils help create high-humidity environment to prevent meat from drying out.

SPECIAL FEATURES

- Front glass pane for merchandise visibility
- 6 epoxy-coated shelves for organized display
- 11.9 cu. ft. of refrigerated storage space
- Foamed-in-place polyurethane insulation
- Digital temperature controls hold at 33-40°F
- Environmentally-friendly R290 refrigerant
- 430 type stainless steel exterior
- Painted aluminum and 304 type stainless steel interior
- Auto defrost feature simplifies maintenance
- 1/4 hp compressor



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDC-120SS-HC	2	6	47 1/4 1200	32 1/2 825	47 7/8 1089	18 508	1/4+	115/60/1	2.6	5-15P 

XDC Series

Deli Case

MODEL #XDC-120-SS-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	47¼"W x 32½"D x 47 7⁄8"H
Interior Dimensions	43¼"W x 26¾"D x 26¾"H
Net Volume	18 cu. ft.
Net Weight	320 lb.
Gross Weight	388 lb.
Packing Dimensions	51¼"W x 36¼"D x 48¾"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	430 Type Stainless Steel
Interior Material	Painted Aluminum and Type 304 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Shelves	(4) of 19¾"W x 22½"D and (2) of 20¾"W x 24¾"D
Shelf Material	Epoxy-coated Steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	3.2
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

PLAN VIEW

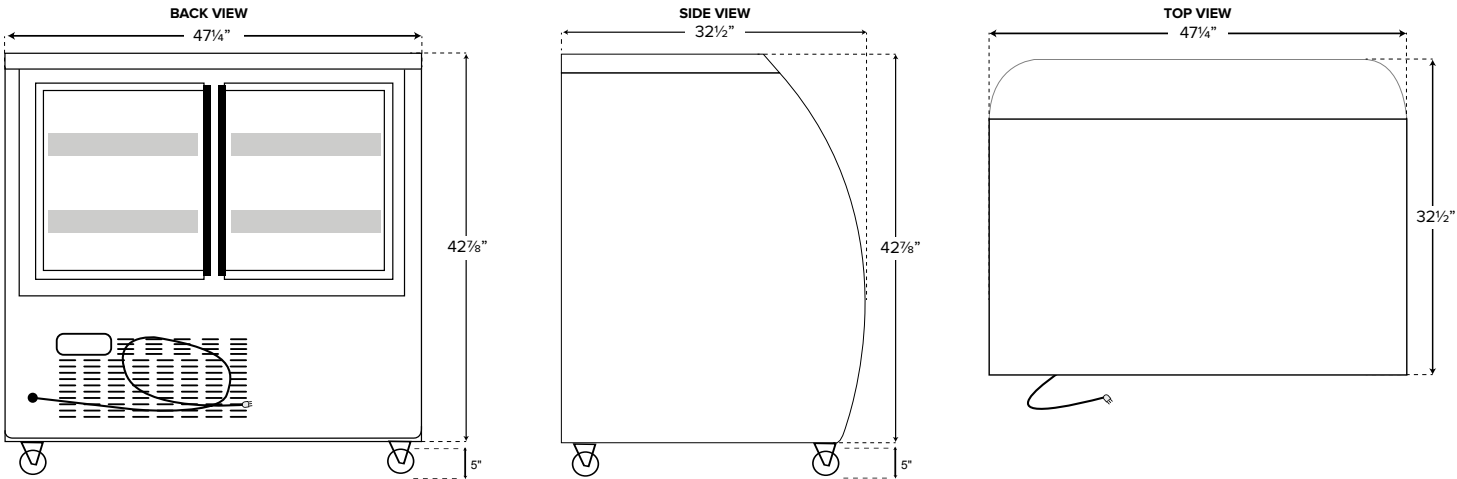

NEMA 5-15P

XDC Series

Deli Case

MODEL #XDC-163SS-HC

Xiltek

XDC SERIES - DELI CASE

For merchandising and storage of deli meats and cheeses, and grab and go sandwiches and salads.

CABINET CONSTRUCTION

Stainless steel exterior with aluminum interior. Interior features stainless steel floor to resist corrosion and rust from the inevitable spill or leak.

Curved, front glass pane provides product visibility for merchandising.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

DOORS

Rear doors slide open for easy placement and removal of products.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

Gravity coils help create high-humidity environment to prevent meat from drying out.

SHELVING

9 epoxy-coated steel shelves included. Each accommodates up to 132 lb. to best suit your needs.

MODEL FEATURES

Intuitive, easy to read digital controls. Auto-defrost function simplifies maintenance and servicing.

Interior LED lighting illuminates product for a bright, effective display.

SPECIAL FEATURES

- Front glass pane for merchandise visibility
- 9 epoxy-coated shelves for organized display
- 21.9 cu. ft. of refrigerated storage space
- Foamed-in-place polyurethane insulation
- Digital temperature controls hold at 33-40°F
- Environmentally-friendly R290 refrigerant
- Type 430 stainless steel exterior
- Painted aluminum and 304 type stainless steel interior
- Auto defrost feature simplifies maintenance
- 3/5 hp compressor



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDC-163SS-HC	3	9	65 1651	32 1/2 825	47 7/8 1089	22 620	3/5	115/60/1	7.2	5-15P 

XDC Series Deli Case

MODEL #XDC-200SS-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	64¼"W x 32½"D x 47 ⅞"H
Interior Dimensions	60¼"W x 26¾"D x 26¾"H
Net Volume	21.9 cu. ft.
Net Weight	400 lb.
Gross Weight	485 lb.
Packing Dimensions	68¼"W x 36¼"D x 48¾"H

Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Painted Aluminum and Type 304 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
# of Doors	3
Door Type	Sliding
# of Shelves	(6) 18½"W x 22½"D and (3) 19½"W x 24¾"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	132 lb.


Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/5
BTU/Hr	2760

Electrical

Voltage	115
Amps	7.14
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

PLAN VIEW

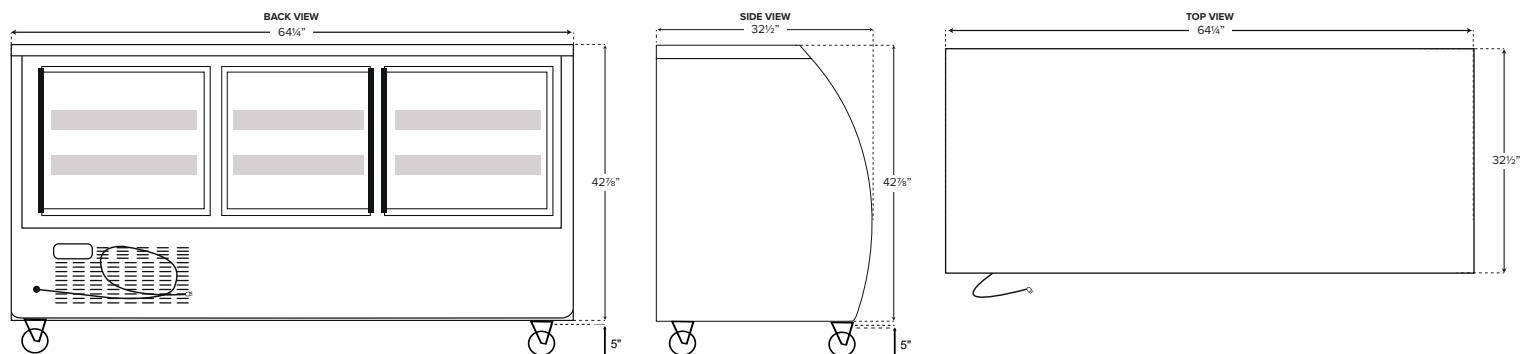

NEMA 5-15P

XDC Series

Deli Case

Xiltek

MODEL #XDC-200SS-HC

XDC SERIES - DELI CASE

For merchandising and storage of deli meats and cheeses, and grab and go sandwiches and salads.

CABINET CONSTRUCTION

430 type stainless steel exterior with aluminum interior. Interior features stainless steel floor to resist corrosion and rust from the inevitable spill or leak.

Curved, front glass pane provides product visibility for merchandising.

Interior LED lighting illuminates product for a bright, effective display.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

DOORS

Rear doors slide open for easy placement and removal of products.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

9 epoxy-coated steel shelves included. Each accommodates up to 90 lb. to best suit your needs.

MODEL FEATURES

Intuitive, easy to read digital controls. Auto-defrost function simplifies maintenance and servicing.

Gravity coils help create high-humidity environment to prevent meat from drying out.

SPECIAL FEATURES

- Front glass pane for merchandise visibility
- 9 epoxy-coated shelves for organized display
- 21.4 cu. ft. of refrigerated storage space
- Foamed-in-place polyurethane insulation
- Digital temperature controls hold at 33-40°F
- Environmentally-friendly R290 refrigerant
- 430 type stainless steel exterior
- Painted aluminum and 304 type stainless steel interior
- Auto defrost feature simplifies maintenance
- 3/4 hp compressor



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDC-200SS-HC	3	9	82 2082	32 1/2 825	47 7/8 1089	32 903	3/4	115/60/1	7.1	5-15P 

XDC Series Deli Case

MODEL #XDC-200SS-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	82"W x 32½"D x 47⅞"H
Interior Dimensions	78"W x 26¾"D x 26¾"H
Net Volume	32 cu. ft.
Net Weight	507 lb.
Gross Weight	602 lb.
Packing Dimensions	86"W x 36¼"D x 48¾"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4



Construction

Exterior Material	430 Type Stainless Steel
Interior Material	Painted Aluminum and Type 304 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Shelves	(6) of 24½"W x 22½"D and (3) of 25½"W x 24¾"D
Shelf Material	Epoxy-coated Steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	7.1
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	98"

PLAN VIEW

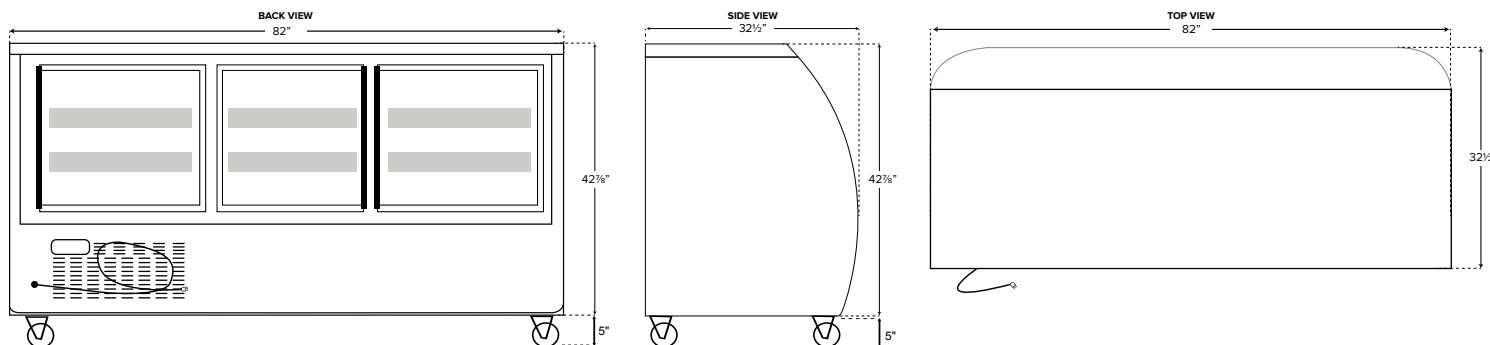

NEMA 5-15P

XRG Series

Glass Door Reach-In Refrigerators

MODEL #XR-1G-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

LED lighted interior saves energy by producing less heat and maximizes visibility for quick product retrieval.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf raises product to a higher level for easy access.

SHELVING

3 gray epoxy-coated steel shelves included.

Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility.

Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XRG SERIES REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Glass door and interior light with on/off switch allow you to monitor product at a glance
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40°F
- 3 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/5 HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XR-1G-HC	1	3	29 736	32 1/4 818	82 1/4 2095	23 650	1/5	115/60/1	2.6	5-15P 

XRG Series

Glass Door Reach-In Refrigerators

MODEL #XR-1G-HC

TECHNICAL DATA



Dimensions

Exterior Dimensions	29"W x 32¼"D x 82½"H
Interior Dimensions	24⅜"W x 27⅞"D x 60¼"H
Net Volume	23 cu. ft.
Net Weight	282 lb.
Gross Weight	321 lb.
Packaging Dimensions	30¼"W x 34"D x 84½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	2.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

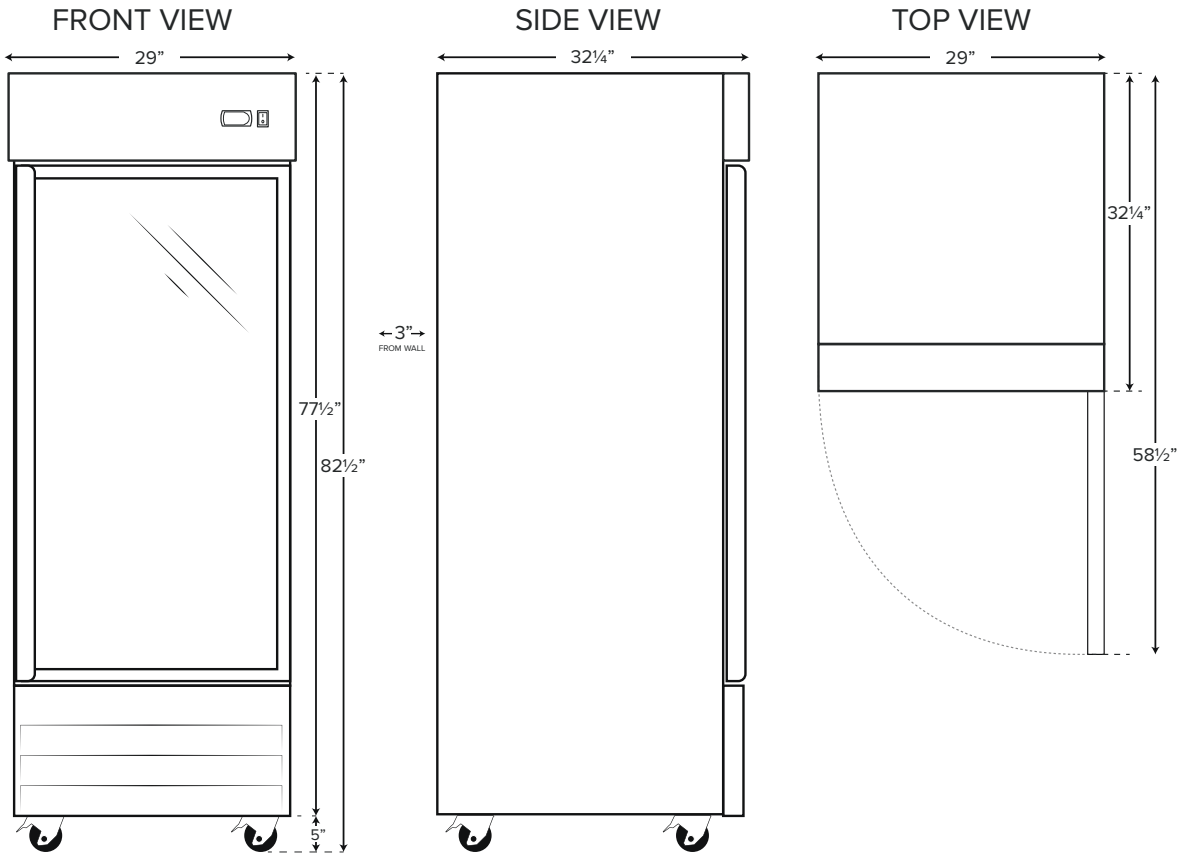

NEMA 5-15P

XR Series

Solid Door Reach-In Refrigerators

MODEL #XR-1-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid door has stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

3 gray epoxy-coated steel shelves included.

Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility.

Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XR Series REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing door with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40°F
- 3 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/5 HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XR-1-HC	1	3	29 736	32 1/4 818	82 1/4 2095	23 650	1/5	115/60/1	2.6	5-15P 

XR Series

Solid Door Reach-In Refrigerators

MODEL #XR-1-HC

TECHNICAL DATA

Xiltek

Dimensions

Exterior Dimensions	29"W x 32¼"D x 82½"H
Interior Dimensions	24⅜"W x 27⅞"D x 60¼"H
Net Volume	23 cu. ft.
Net Weight	282 lb.
Gross Weight	321 lb.
Packaging Dimensions	30¼"W x 34"D x 84½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	2.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

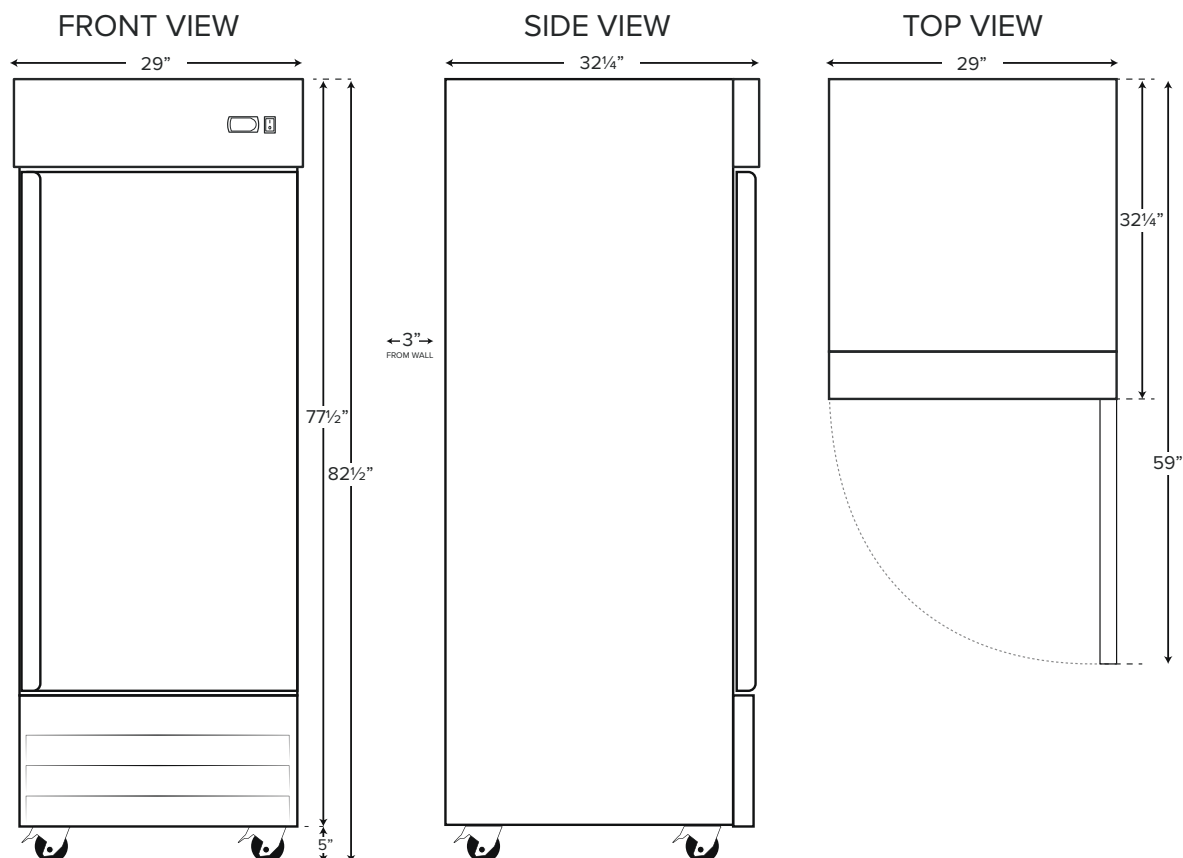

NEMA 5-15P

XRG Series

Glass Door Reach-In Refrigerators

MODEL #XR-2G-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

LED lighted interior saves energy by producing less heat and maximizes visibility for quick product retrieval.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf raises product to a higher level for easy access.

SHELVING

6 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility.

Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.

Xiltek

XRG SERIES REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40°F
- 6 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/4 HP
- ETL Safety & Sanitation Listed



★ Conforms to UL & NSF-7 Standards

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XR-2G-HC	2	6	54 1371	32 1/4 818	82 1/4 2095	47 1321	1/4+	115/60/1	4.3	5-15P 

XRG Series

Glass Door Reach-In Refrigerators

MODEL #XR-2G-HC

TECHNICAL DATA



Dimensions

Exterior Dimensions	54"W x 32¼"D x 82½"H
Interior Dimensions	49⅜"W x 27⅞"D x 60¼"H
Net Volume	47 cu. ft.
Net Weight	448 lb.
Gross Weight	530 lb.
Packaging Dimensions	56¼"W x 34¾"D x 85½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

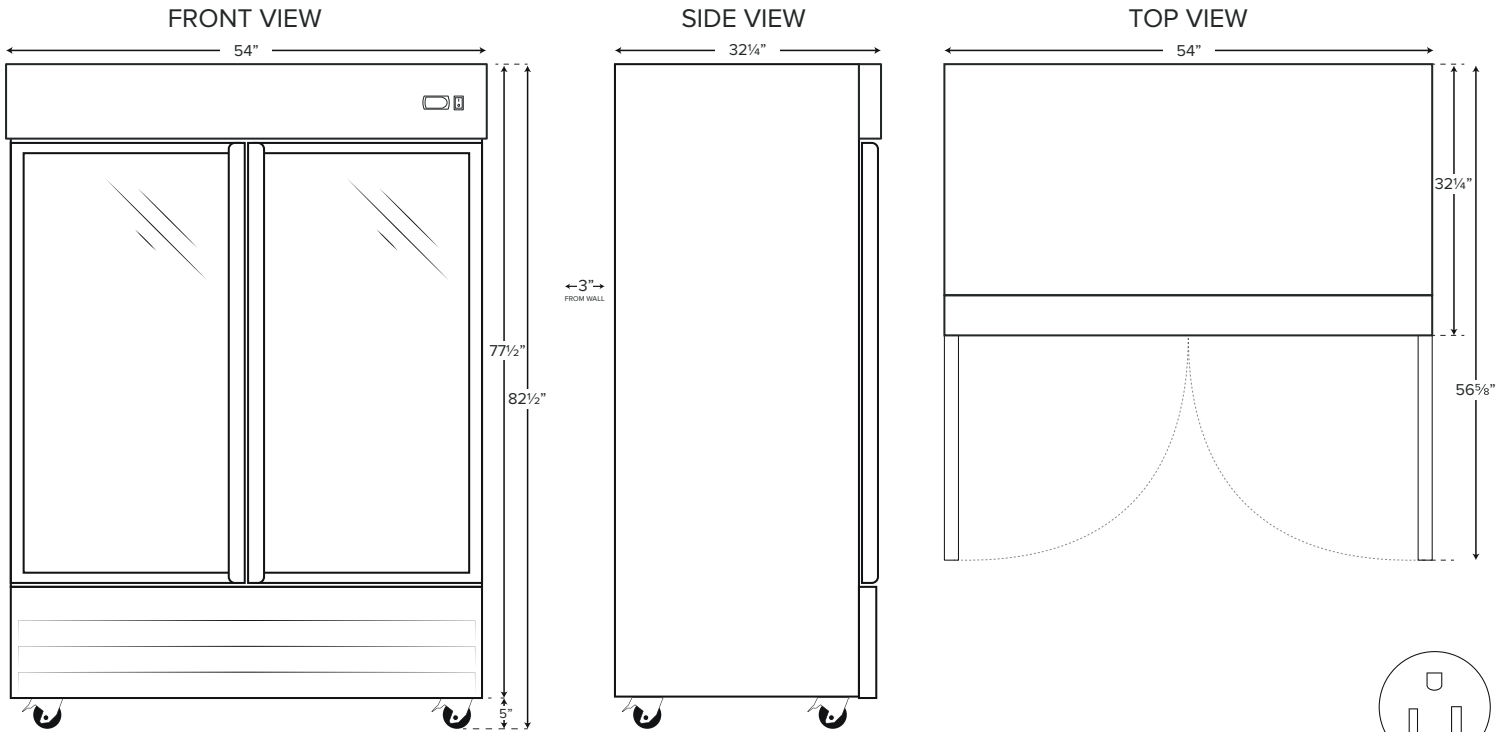

NEMA 5-15P

XR Series

Solid Door Reach-In Refrigerators

MODEL #XR-2-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid doors have stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

6 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XR Series REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing doors with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33-40°F
- 6 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1/4 HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.	
			L	D	H						
XR-2-HC	2	6	54 1371	32 1/4 818	82 1/4 2095	47 1321	1/4+	115/60/1	3.8	5-15P	

XR Series

Solid Door Reach-In Refrigerators

Xiltek

MODEL #XR-2-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	54"W x 32¼"D x 82½"H
Interior Dimensions	49⅜"W x 27⅞"D x 60¼"H
Net Volume	47 cu. ft.
Net Weight	448 lb.
Gross Weight	530 lb.
Packaging Dimensions	56¼"W x 34¾"D x 85½"H

Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 20⅞"W x 25⅜"D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	3.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

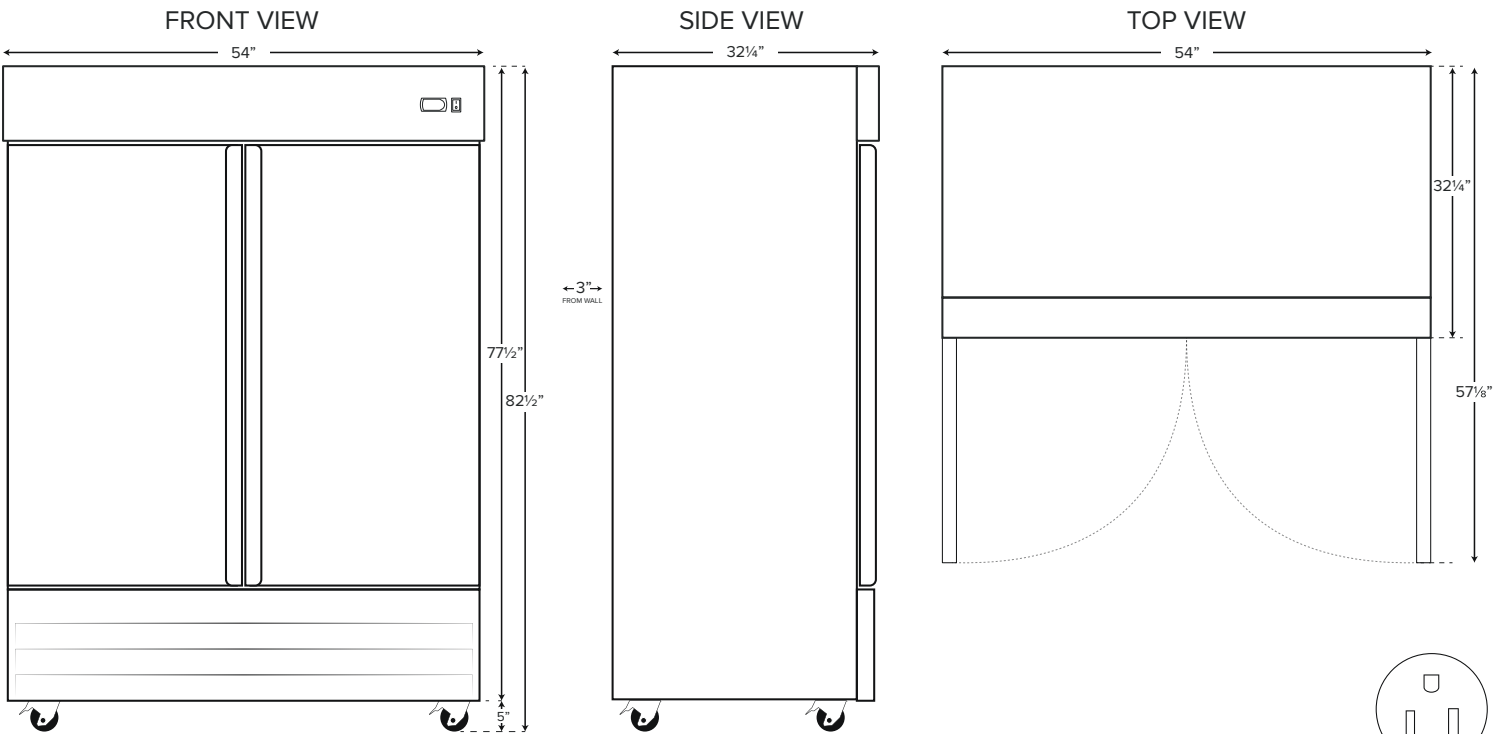

NEMA 5-15P

XR Series Solid Door Reach-In Refrigerators

MODEL #XR-3-HC

CABINET CONSTRUCTION

Heavy duty all-stainless steel construction includes corrosion-resistant 304 stainless steel interior and durable 430 stainless steel exterior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Removable one-piece grill simplifies cleaning and servicing.

Stainless steel solid doors have stay-open feature beyond 90° for easy loading, but will self-close under 90° to save energy. Each door is outfitted with an easy-to-grasp full length handle

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

“No stoop” lower shelf raises product to a higher level for easy access.

SHELVING

9 gray epoxy-coated steel shelves included. Each accommodates up to 120 lb.

MODEL FEATURES

Preprogrammed digital controls feature auto-defrost function.

Shelf rails accommodate full size food pans for storage flexibility. Optional bun pan rails accommodate full size bun pans.

Interior back panel separates shelf and back wall to promote proper airflow.



★ Conforms to UL & NSF-7 Standards

Xiltek

XR SERIES REACH-IN REFRIGERATOR

Keep ingredients within a safe temperature range in a sleek, durable, and easy-to-clean environment

SPECIAL FEATURES

- Self-closing doors with convenient stay-open feature
- Easy-to-clean 430 series stainless steel exterior
- Corrosion-resistant 304 series stainless steel interior
- Temperature range of 33°F to 40°F
- 9 shelves included; versatile shelf slide design also accepts full size food pans
- Environmentally-safe R290 refrigerant
- Digital temperature controller with automatic defrost function
- 115V; 1 ¼ HP
- ETL Safety & Sanitation Listed



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XR-3-HC	3	9	80 9/10 2054	32 1/4 818	82 1/4 2095	72 2040	3/4	115/60/1	9	5-15P 

XR Series

Solid Door Reach-In Refrigerators

MODEL #XR-3-HC

TECHNICAL DATA



Dimensions

Exterior Dimensions	80 ⁷ / ₈ "W x 32 ¹ / ₄ "D x 82 ¹ / ₂ "H
Interior Dimensions	76 ¹ / ₄ "W x 27 ¹ / ₈ "D x 60 ¹ / ₄ "H
Net Volume	72 cu. ft.
Net Weight	615 lb.
Gross Weight	693 lb.
Packaging Dimensions	83 ¹ / ₂ "W x 34 ³ / ₄ "D x 85 ¹ / ₂ "H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1 1/4



Construction

Exterior Material	430 Stainless Steel
Interior Material	304 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(6) 20 ⁷ / ₈ "W x 25 ³ / ₁₆ "D & (3) 22 ¹ / ₈ "W x 25 ³ / ₁₆ "D
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	120 lb.

Electrical

Voltage	115
Amps	12
Hz	60
Phase	1
Plug Type	NEMA 5-20P
Electrical Cord Length	96"

PLAN VIEW

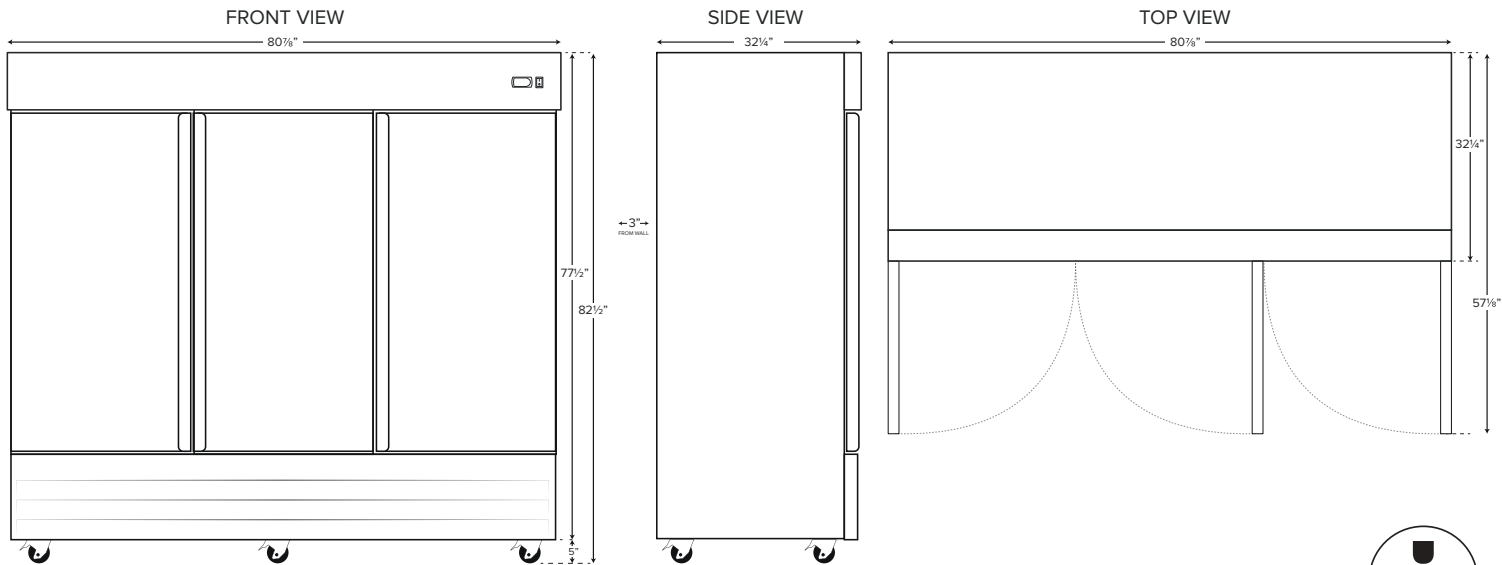

NEMA 5-20P

XBB Series

Back Bar Refrigerator

Xiltek

MODELS #XBB-24-48G-HC

XBB SERIES - NARROW DEPTH, GLASS DOOR

Optimize space behind your bar.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a 201 type stainless steel interior features coved corners for easy clean-up. Self-closing, glass doors come standard with locks to protect contents inside. Durable, 1½" thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance.

SHELVING

4 epoxy-coated steel shelves included. Each accommodates up to 90 lb.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. LED lighting ensures optimal product visibility. Accommodates two ½ size kegs. Narrow depth design makes this unit ideal for tight bar spaces.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, black coated steel exterior with glass doors
- 201 type stainless steel interior with coved corners maintains temperatures from 33-40°F
- Four epoxy-coated steel shelves accommodate up to 90 lb. each
- Accommodates up to (2) ½ kegs
- Foamed-in-place polyurethane insulation
- Built-in 1½" stainless steel top
- 115V; 1/5 hp
- Stainless steel interior is food rated and marked with the ETL Sanitation mark



Model	Doors	Cabinet Dimensions (inches / mm)			Capacity	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XBB-24-48G-HC	2	48.8 1240	24.4 620	35.6 905	11.8 cu.ft. 335L	1/5	115/60/1	2.88	5-15P 

XBB Series

Back Bar Refrigerator



MODELS #XBB-24-48G-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	48¾"W x 24⅞"D x 35⅝"H
Interior Dimensions	36¼"W x 18½"D x 30½"H
Net Volume	13 cu. ft.
Product Capacity	(2) ½ kegs
Net Weight	231 lb.
Gross Weight	282 lb.
Packaging Dimensions	51¼"W x 27½"D x 41¾"H

Cooling

Temperature Range	33 - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Countertop Type	Type 430 Stainless Steel
Door Type	Glass
Insulation Material	Foamed-in-place polyurethane
Shelf Size	(4) 17⅝" x 18⅛"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	2.88
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

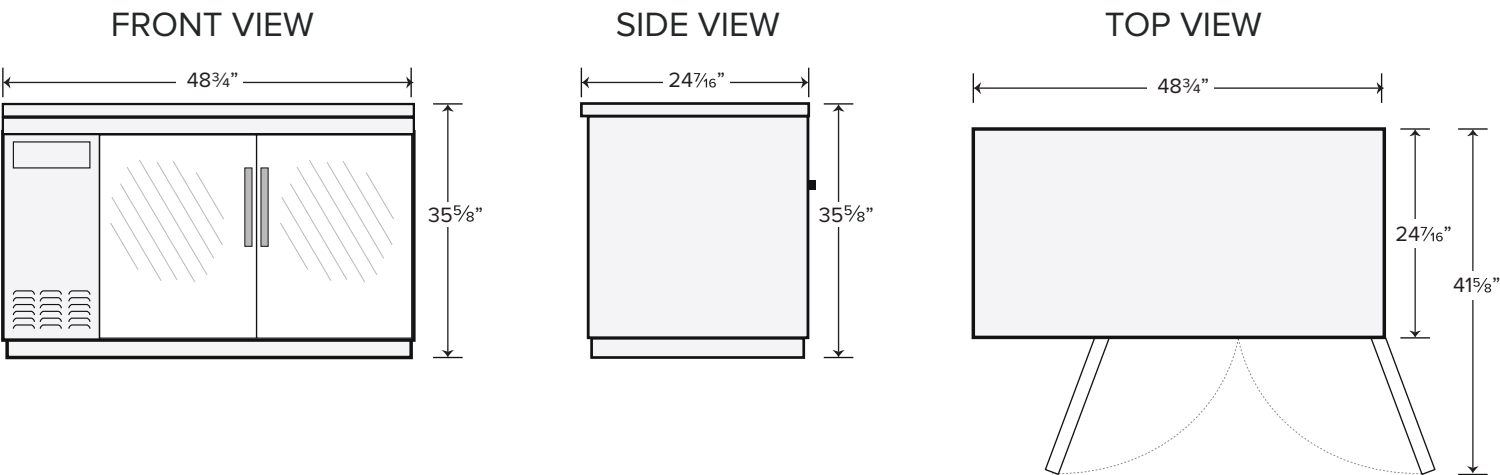

NEMA 5-15P

XBB Series

Back Bar Refrigerator



MODELS #XBB-24-60G-HC

XBB SERIES - NARROW DEPTH, GLASS DOOR

Optimize space behind your bar.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a 201 type stainless steel interior features coved corners for easy clean-up. Self-closing, glass doors come standard with locks to protect contents inside. Durable, 1½” thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance.

SHELVING

4 epoxy-coated steel shelves included. Each accommodates up to 90 lb.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. LED lighting ensures optimal product visibility. Accommodates two ½ size kegs. Narrow depth design makes this unit ideal for tight bar spaces.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, black coated steel exterior with glass doors
- 201 type stainless steel interior with coved corners maintains temperatures from 33-40°F
- Four epoxy-coated steel shelves accommodate up to 90 lb. each
- Accommodates up to (2) ½ kegs
- Foamed-in-place polyurethane insulation
- Built-in 1½” stainless steel top
- 115V; 1/5 hp
- Stainless steel interior is food rated and marked with the ETL Sanitation mark



Model	Doors	Cabinet Dimensions (inches / mm)			Capacity	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XBB-24-60G-HC	2	60.8 1544	24.4 620	35.6 905	15.8 cu.ft. 446L	1/5	115/60/1	2.88	5-15P 

XBB Series

Back Bar Refrigerator



MODELS #XBB-24-60G-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	60¾"W x 25¾"D x 35⅝"H
Interior Dimensions	48¼"W x 18½"D x 28⅞"H
Net Volume	17.3 cu. ft.
Product Capacity	(2) ½ kegs
Net Weight	276 lb.
Gross Weight	319 lb.
Packaging Dimensions	63½"W x 27½"D x 41¾"H

Cooling

Temperature Range	33 - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Countertop Type	Type 430 Stainless Steel
Door Type	Glass
Insulation Material	Foamed-in-place polyurethane
Shelf Size	(4) 23⅝" x 18⅛"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	2.88
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

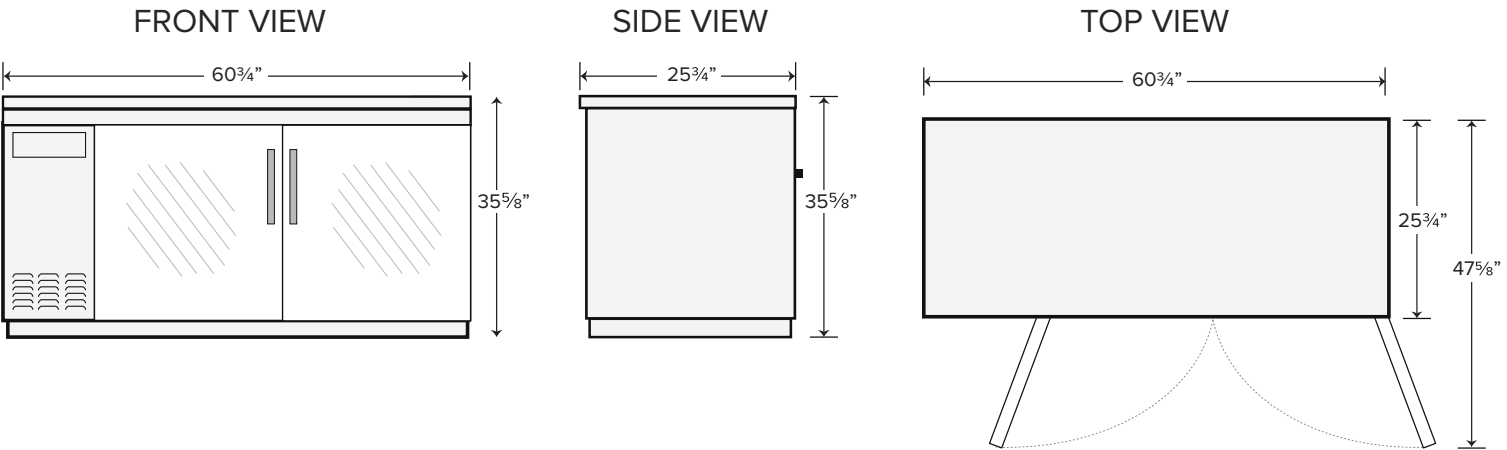

NEMA 5-15P

XBB Series Back Bar Refrigerator

Xiltek

MODELS #XBB-24-72G-HC

XBB SERIES - NARROW DEPTH, GLASS DOOR

Optimize space behind your bar.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a 201 type stainless steel interior features coved corners for easy clean-up. Self-closing, glass doors come standard with locks to protect contents inside. Durable, 1½" thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance.

SHELVING

6 epoxy-coated steel shelves included. Each accommodates up to 90 lb.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. LED lighting ensures optimal product visibility. Accommodates three ½ size kegs. Narrow depth design makes this unit ideal for tight bar spaces.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, black coated steel exterior with glass doors
- 201 type stainless steel interior with coved corners maintains temperatures from 33-40°F
- Six epoxy-coated steel shelves accommodate up to 90 lb. each
- Accommodates up to (3) ½ kegs
- Foamed-in-place polyurethane insulation
- Built-in 1½" stainless steel top
- 115V; 1/4 hp
- Stainless steel interior is food rated and marked with the ETL Sanitation mark



Model	Doors	Cabinet Dimensions (inches / mm)			Capacity	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XBB-24-72G-HC	3	72.8 1848	24.4 620	35.6 905	19.6 cu.ft. 556L	1/4+	115/60/1	3.96	5-15P 

XBB Series

Back Bar Refrigerator



MODELS #XBB-24-72G-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	72¾"W x 24⅞"D x 35⅝"H
Interior Dimensions	60⅞"W x 18½"D x 30½"H
Net Volume	21.6 cu. ft.
Product Capacity	(3) ½ kegs
Net Weight	331 lb.
Gross Weight	374 lb.
Packaging Dimensions	75¼"W x 27½"D x 41¾"H

Cooling

Temperature Range	33 - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Countertop Type	Type 430 Stainless Steel
Door Type	Glass
Insulation Material	Foamed-in-place polyurethane
Shelf Size	(4) 19" x 18¼" + (2) 20½" x 18⅞"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	3.96
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

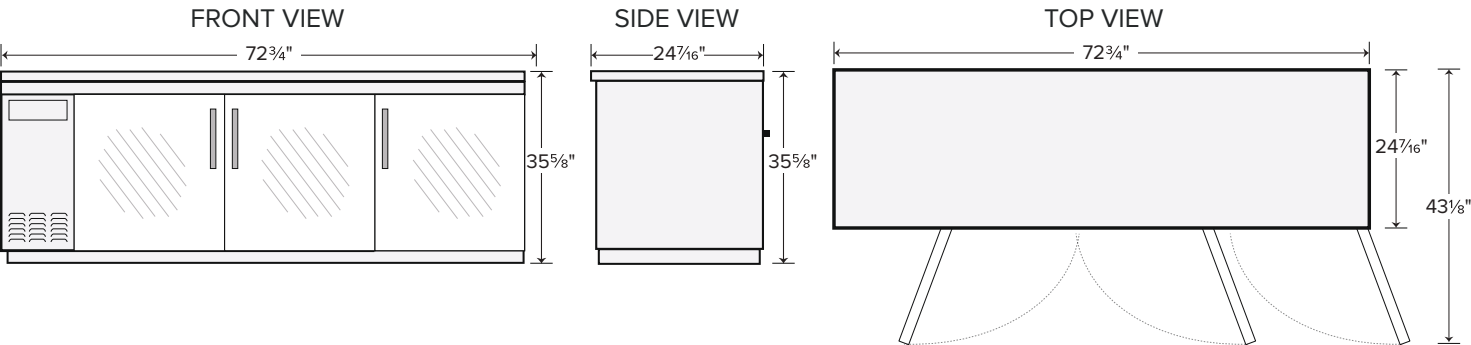

NEMA 5-15P

XBB Series

Back Bar Refrigerator

Xiltek

MODELS #XBB-27-90G-HC

XBB SERIES - NARROW DEPTH, GLASS DOOR

Optimize space behind your bar.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a 201 type stainless steel interior features coved corners for easy clean-up. Self-closing, glass doors come standard with locks to protect contents inside. Durable, 1½" thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance.

SHELVING

6 epoxy-coated steel shelves included. Each accommodates up to 90 lb.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. LED lighting ensures optimal product visibility. Standard depth accommodates four ½ size kegs.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, black coated steel exterior with glass doors
- 201 type stainless steel interior with coved corners maintains temperatures from 33-40°F
- Six epoxy-coated steel shelves accommodate up to 90 lb. each
- Accommodates up to (4) 1/2 kegs
- Foamed-in-place polyurethane insulation
- Built-in 1½" stainless steel top
- 115V; 1/4 hp
- Stainless steel interior is food rated and marked with the ETL Sanitation mark



Model	Doors	Shelves	Cabinet Dimensions (inches / mm)			Capacity		HP	Voltage	Amps	NEMA Config.
			L	D	H	12 oz. Cans	1/2 Barrels				
XBB-27-90G-HC	3	6	90 3/8 2295	27 3/4 705	36 1/4 920	152 6-pks	4	1/4+	115/60/1	4.7	5-15P 

XBB Series

Back Bar Refrigerator



MODELS #XBB-24-90G-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	90 3/8" W x 27 3/4" D x 36 1/4" H
Interior Dimensions	77 3/4"W x 22 1/2"D x 30 1/2"H
Net Volume	32.4 cu. ft.
Product Capacity	(4) 1/2 kegs
Net Weight	364 lb.
Gross Weight	407 lb.
Packaging Dimensions	91 3/4"W x 30 1/2"D x 41 3/4"H

Cooling

Temperature Range	33 - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Countertop Type	Type 430 Stainless Steel
Door Type	Glass
Insulation Material	Foamed-in-place polyurethane
Shelf Size	(4) 22 1/2" x 21 1/2" + (2) 24 3/4" x 21 1/2"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	4.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

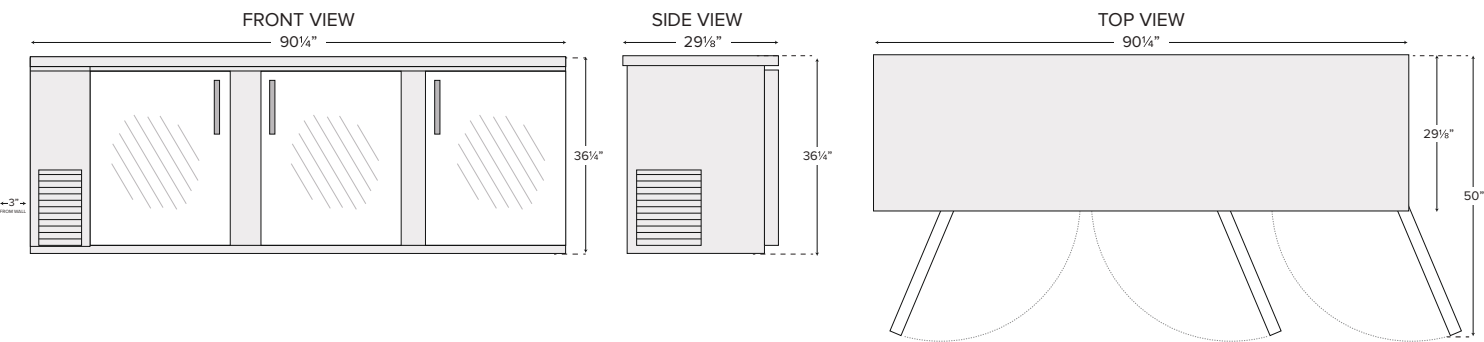

NEMA 5-15P



XDD Series Beer Dispenser

Model: XDD-24-60-HC

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 201 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

SHELVING

4 epoxy-coated steel shelves included to optionally store cans or bottles.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 4 "D" couplers per tap.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature.

Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (2) ½ kegs
- (2) double tap towers with 10¼" faucet height
- ½ hp compressor uses eco-friendly R290 hydrocarbon refrigerant
- 2 self-closing, locking doors
- LED lights illuminate interior
- Includes 4 "D" couplers per tap
- Attractive black coated steel exterior for durability
- 115V



Model	Doors	Cabinet Dimensions (inches / mm)			Capacity 1/2 Barrels	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XDD-24-60-HC	2	60.8 1544	24.4 620	35.6 905	2	1/5	115/60/1	3	5-15P 

● Height does not include 15.8" (402mm) for draft arm.

XDD Series

Beer Dispenser

MODEL #XDD-24-60-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	60¾"W x 24⅜"D x 35⅝"H
Interior Dimensions	48¼"W x 18½"D x 28⅞"H
Tap Tower Dimensions	16"H 3"Diameter
Faucet Height	10¼"
Product Capacity	(2) ½ Keg
Net Volume	17.3 cu. ft.
Net Weight	276 lb.
Gross Weight	319 lb.
Packaging Dimensions	63½"W x 27½"D x 41¾"H

Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Insulation Material	Foamed-in-place polyurethane
Taps	4
Shelves	(4) 23⅝" x 18⅞"
Shelf Material	Epoxy-coated steel



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

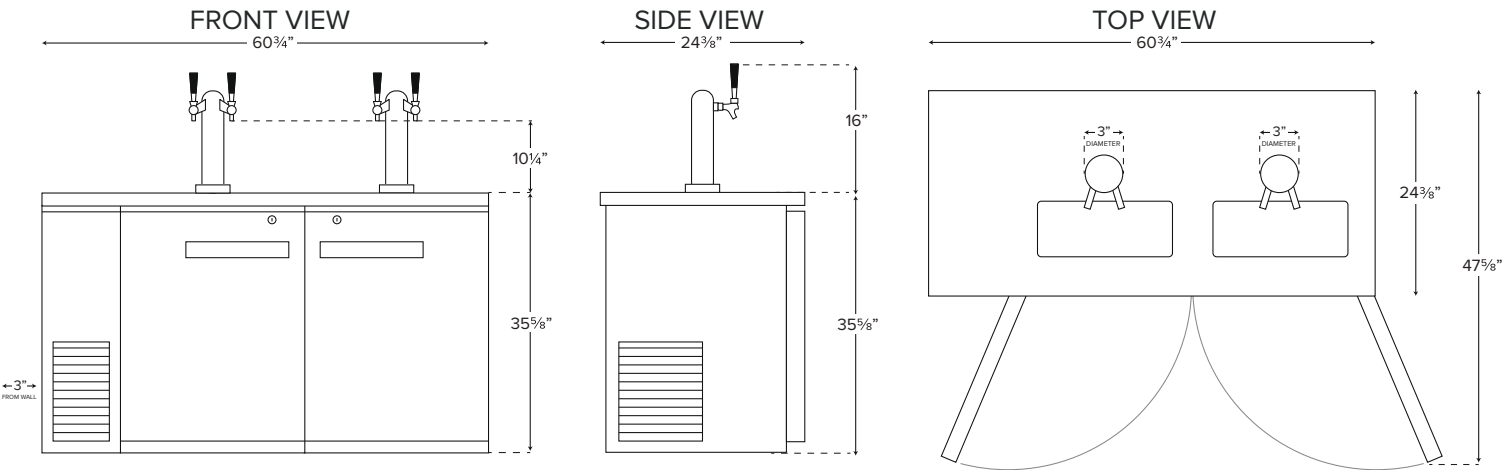

NEMA 5-15P



XDD Series Beer Dispenser

Model: XDD-24-72-HC

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 201 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

SHELVING

6 epoxy-coated steel shelves included to optionally store cans or bottles.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 4 "D" couplers per tap.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature.

Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (3) ½ kegs
- (2) double tap towers with 10¼" faucet height
- ¼ hp compressor uses eco-friendly R290 hydrocarbon refrigerant
- 3 self-closing, locking doors
- LED lights illuminate interior
- Includes 4 "D" couplers per tap
- Attractive black coated steel exterior for durability
- 115V



Model	Doors	Cabinet Dimensions (inches / mm)			Capacity 1/2 Barrels	HP	Voltage	Amps	NEMA Config.
		L	D	H					
XDD-24-72-HC	3	72.8 1848	24.4 620	35.6 905	3	1/4+	115/60/1	4	5-15P 

● Height does not include 15.8" (402mm) for draft arm.

XDD Series

Beer Dispenser

MODEL #XDD-24-72-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	72¾"W x 24⅜"D x 36⅝"H
Interior Dimensions	60⅞"W x 18½"D x 28⅞"H
Tap Tower Dimensions	16"H 3"Diameter
Faucet Height	10¼"
Product Capacity	(3) ½ Keg
Net Volume	21.6 cu. ft.
Net Weight	331 lb.
Gross Weight	374 lb.
Packaging Dimensions	75¼"W x 27½"D x 41¾"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Insulation Material	Foamed-in-place polyurethane
Taps	4
Shelves	(4) 19" x 18¼" + (2) 20½" x 18⅛"
Shelf Material	Epoxy-coated steel

Electrical

Voltage	115
Amps	4
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

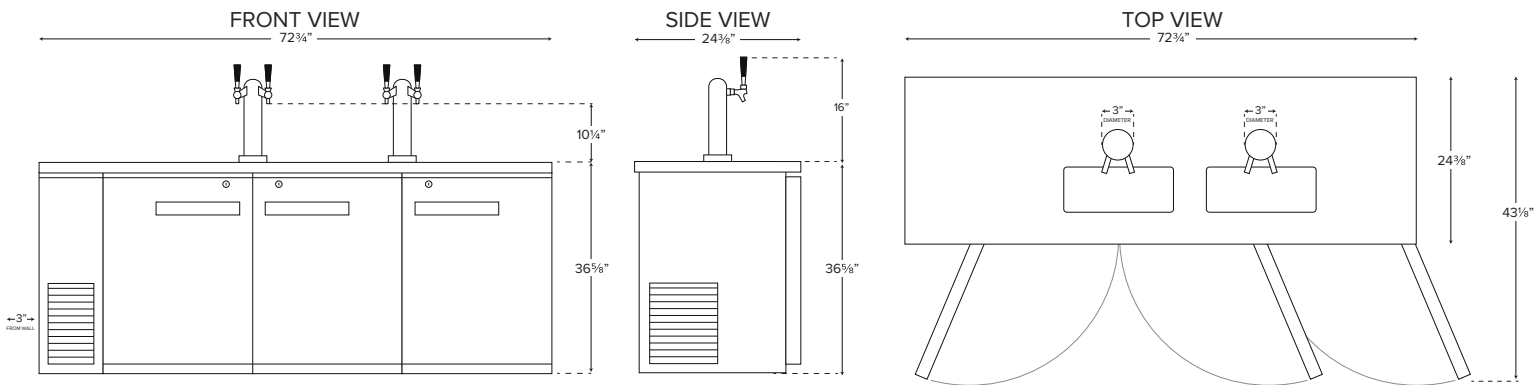

NEMA 5-15P



XDD Series Beer Dispenser

Model: XDD-27-90-HC

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 201 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 4 "D" couplers per tap.

SHELVING

6 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (4) ½ kegs
- 2 double tap towers with 10¼" faucet height
- ¼ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 4 "D" couplers per tap
- Black coated steel exterior and 201 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



Model	Doors	Shelves	Cabinet Dimensions (inches / mm)			Capacity 1/2 Barrels	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XDD-27-90-HC	3	6	90 3/8 2295	27 3/4 705	36 1/4 920	4	1/4+	115/60/1	4.7	5-15P 

Height does not include 15 1/4" (388 mm) for draft arms.

XDD Series Beer Dispenser

MODEL #XDD-27-90-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	90¼"W x 27¾"D x 36¼"H
Interior Dimensions	77¾"W x 22½"D x 30½"H
Tap Tower Dimensions	16"H 3"Diameter
Faucet Height	10¼"
Product Capacity	(4) ½ Kegs
Net Volume	32.4 cu. ft.
Net Weight	364 lb.
Gross Weight	407 lb.
Packaging Dimensions	91¾"W x 30½"D x 41¾"H

Construction

Exterior Material	Black Coated Steel
Interior Material	Type 201 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Taps	4
Shelves	(4) 22½" x 21½" + (2) 24¾" x 21½"
Shelf Material	Epoxy-Coated Steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

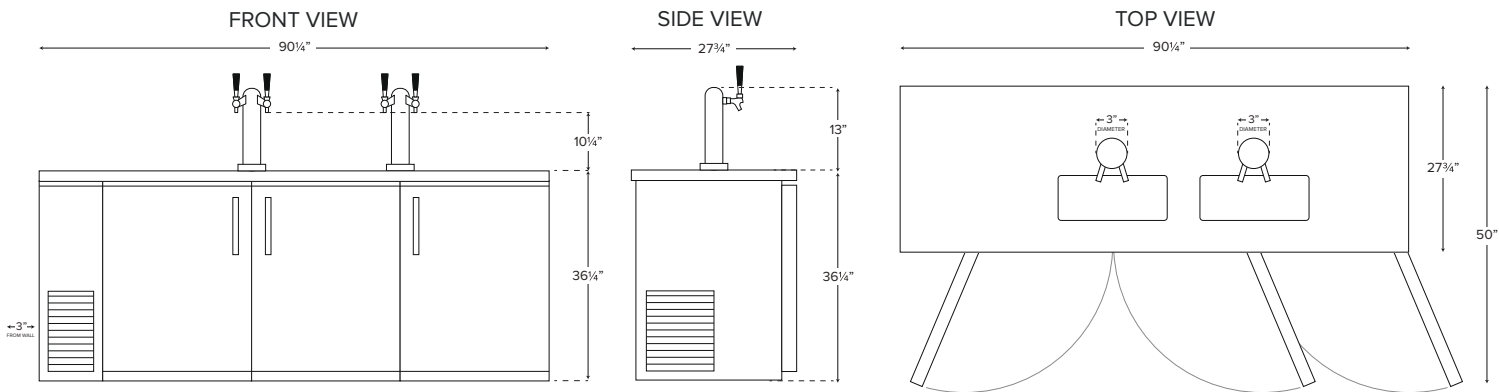

NEMA 5-15P

XRM Series

Glass Door Merchandiser

MODELS | #XRM-10-HC

Xiltek

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom mount condensing unit positioned for easy maintenance.

"No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

Four white epoxy-coated steel shelves included.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Single self-closing, anti-fog glass door
- Interior LED lighting
- (4) Epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Available in black or white powder-coated steel exterior



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-10-HC	1	4	21.7 550	21.7 550	63 1600	9.1 258	1/5	115/60/1	2.88	5-15P 

XRM Series Glass Door Merchandiser

MODELS | #XRM-10-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	21 ⁵ / ₈ "W x 21 ⁵ / ₈ "D x 63"H
Interior Dimensions	18 ⁷ / ₈ "W x 18 ¹ / ₄ "D x 46"H
Net Volume	9.1 cu. ft.
Net Weight	190 lbs.
Gross Weight	224 lbs.
Packaging Dimensions	23 ³ / ₄ "W x 24 ³ / ₄ "D x 69"H

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 14" x 18"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R-290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	2.88
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

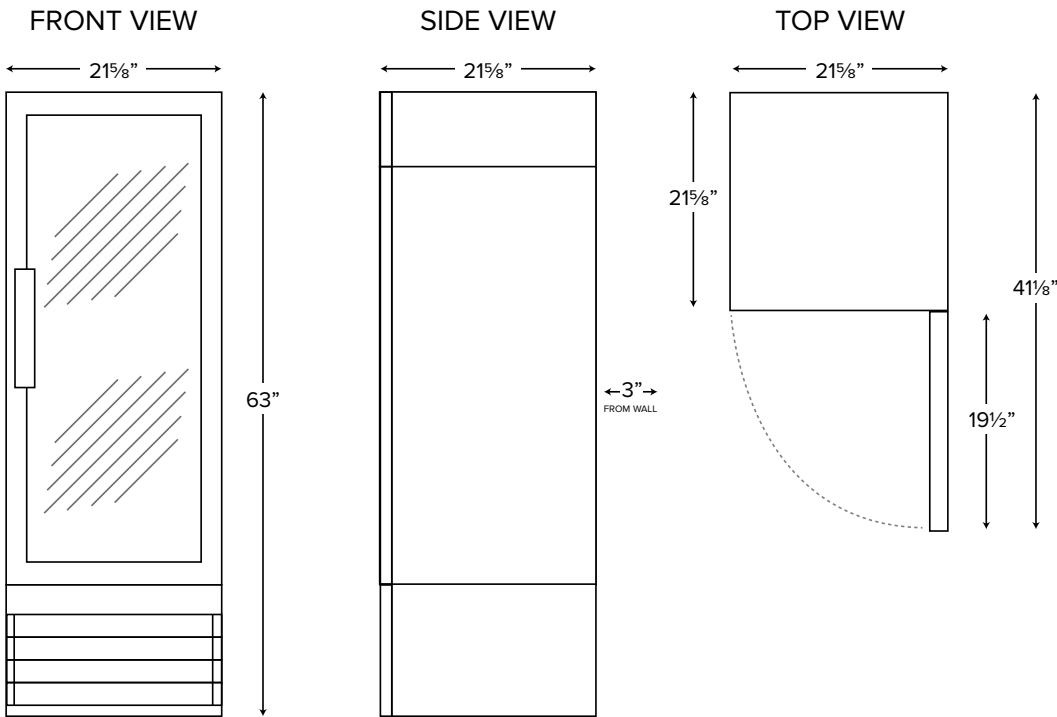

NEMA 5-15P

XRM Series

Glass Door Merchandiser

Xiltek

MODELS | #XRM-16F-HC

XRM SERIES - GLASS DOOR FREEZER

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

"No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

4 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Single self-closing, anti-fog glass door
- Interior LED lighting
- (4) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Eco-friendly R290 hydrocarbon refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-16F-HC	1	4	27.2 690	26.2 665	85.38 2144	16 450	3/4	115/60/1	8.8	5-15P 

XRM Series

Glass Door Merchandiser

MODELS | #XRM-16F-HC

X

iltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	27 ¹ / ₈ "W x 26 ¹ / ₄ "D x 85 ³ / ₈ "H
Interior Dimensions	21 ¹ / ₄ "W x 19 ¹ / ₄ "D x 55 ¹ / ₈ "H
Net Volume	16 cu. ft.
Net Weight	304 lbs.
Gross Weight	348 lbs.
Packaging Dimensions	30 ¹ / ₄ "W x 30 ³ / ₄ "D x 87"H

Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4



Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 20 ⁷ / ₈ " x 17 ³ / ₄ "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	8.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

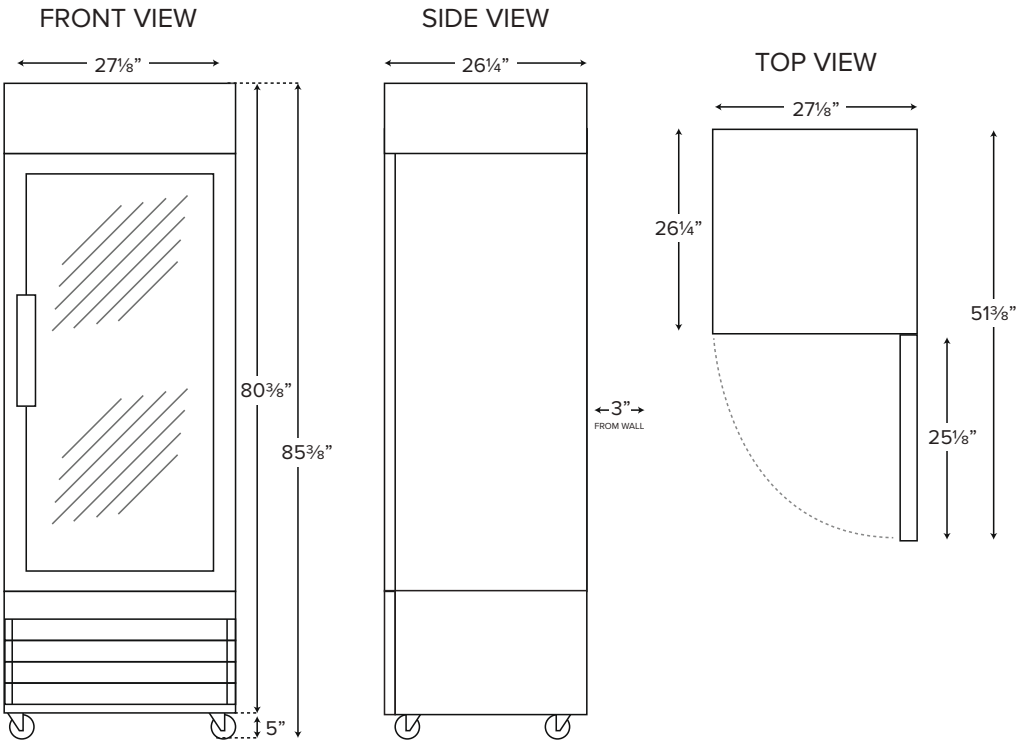

NEMA 5-15P

XRM Series

Glass Door Merchandiser

Xiltek

MODELS | #XRM-23-HC

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

Four white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Single self-closing, anti-fog glass door
- Interior LED lighting
- (4) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Available in black or white powder-coated steel exterior
- Eco-friendly R290 hydrocarbon refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-23-HC	1	4	28.3 720	31.9 810	84.38 2144	23 648	1/5	115/60/1	3	5-15P 

XRM Series

Glass Door Merchandiser

MODELS | #XRM-23-HC

X

iltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	28⅜"W x 31⅞"D x 84⅜"H
Interior Dimensions	25¼"W x 28⅜"D x 62½"H
Net Volume	23 cu. ft.
Net Weight	320 lbs.
Gross Weight	352 lbs.
Packaging Dimensions	30"W x 65½"D x 85½"H

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(4) 24¼" x 23¼"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

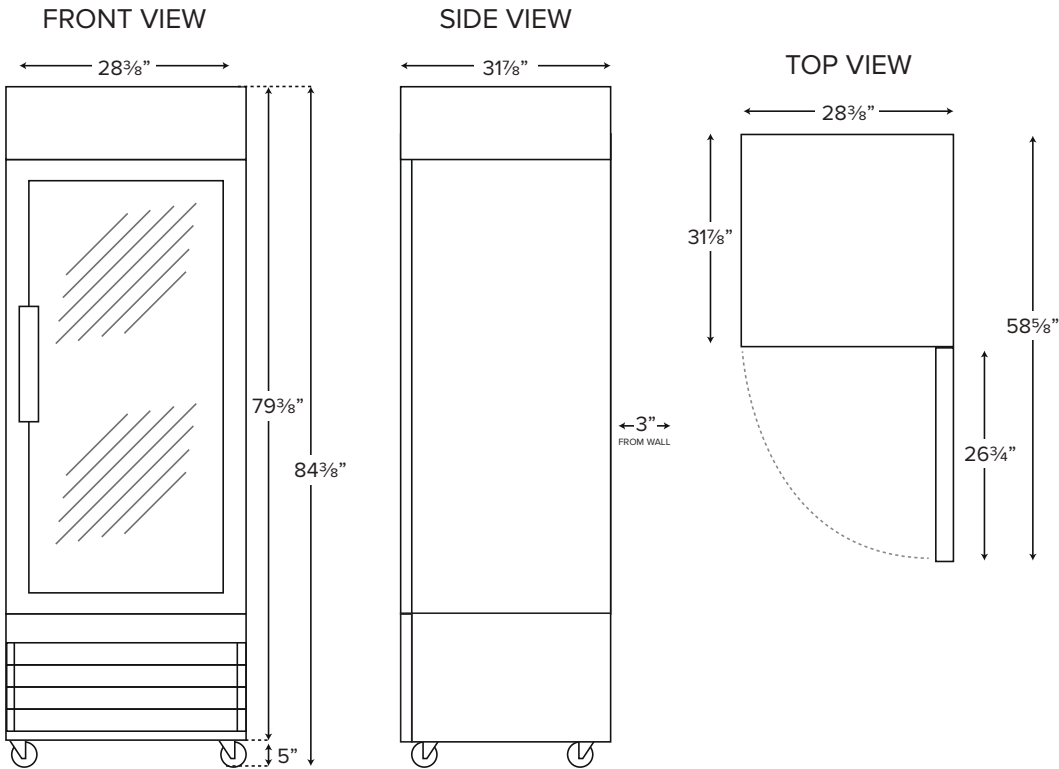

NEMA 5-15P

XRM Series

Glass Door Merchandiser

MODEL #XRM-49-HC

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale.

CABINET CONSTRUCTION

Heavy duty construction includes black or white-coated aluminum interior walls and stainless steel floor. Exterior features black or white peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

2 dual-pane tempered glass swing doors self-close to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom mount condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

8 epoxy-coated steel shelves accommodate up to 90 lb. each.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Digital controller features auto-defrost function.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Xiltek

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 2 self-closing, glass swing doors
- 8 epoxy-coated steel shelves each holds up to 90 lb. of weight
- Bright, LED lighting
- Maintains temperatures between 33° and 40°F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black or white coated steel exterior and painted aluminum interior
- Stainless steel floor
- Auto defrost for easy maintenance
- 115V, 1 hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-49S-HC	2	8	53.1 1350	31.9 810	84.38 2144	49 1390	1/4+	115/60/1	4.3	5-15P 

XRM Series Glass Door Merchandiser

MODELS #XRM-49-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	53 $\frac{1}{8}$ "W x 31 $\frac{7}{8}$ "D x 84 $\frac{3}{8}$ "H
Interior Dimensions	50"W x 28 $\frac{3}{8}$ "D x 61 $\frac{7}{8}$ "H
Net Volume	49 cu. ft.
Net Weight	437 lb.
Gross Weight	480 lb.
Packaging Dimensions	54 $\frac{1}{4}$ "W x 33"D x 84 $\frac{1}{2}$ "H

Construction

Exterior Material	Black Coated Steel
Interior Material	Painted Aluminum
Door Type	Glass Swing
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(8) 24 $\frac{3}{8}$ " x 23 $\frac{5}{8}$ "
Shelf Material	Plastic-Coated Steel
Shelf Load Capacity	90 lb.


Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.5
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

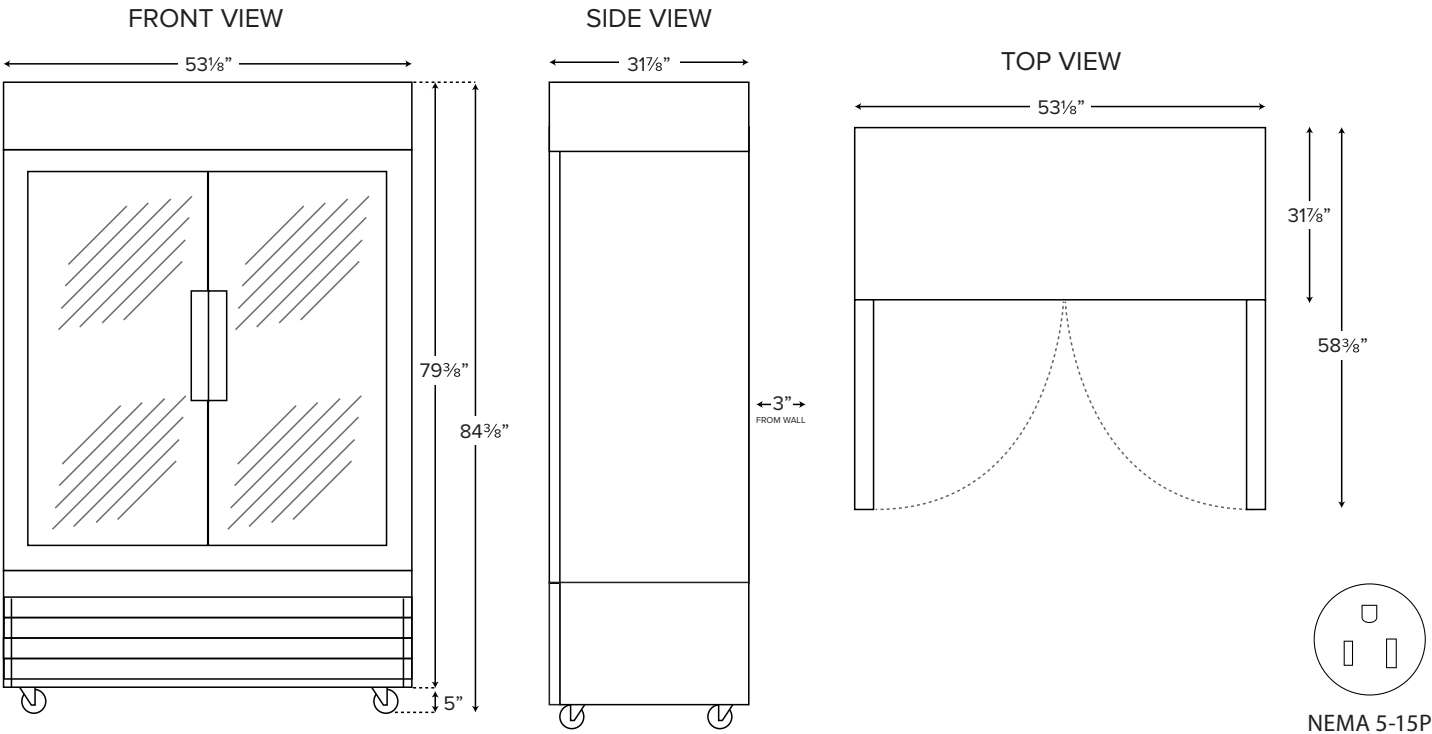

XRM Series

Glass Door Merchandiser

MODEL #XRM-49F-HC

Xiltek

XRM SERIES - GLASS DOOR FREEZER

Used for the merchandising and storage of hermetically sealed products for sale.

CABINET CONSTRUCTION

Heavy duty construction includes black coated aluminum interior walls and stainless steel floor. Exterior features black or white peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

2 dual-pane tempered glass swing doors self-close to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom mount condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

8 epoxy-coated steel shelves accommodate up to 90 lb. each.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Digital controller features auto-defrost function.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 2 self-closing, glass swing doors
- 8 epoxy-coated steel shelves each holds up to 90 lb. of weight
- Bright, LED lighting
- Maintains temperatures between (-8)°F - (-1)°F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black or white coated steel exterior and painted aluminum interior
- Stainless steel floor
- Auto defrost for easy maintenance
- 115V, 1 hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-49F-HC	2	8	53 1/8 1350	31 7/8 810	84 3/8 2188	49 1390	1	115/60/1	9.2	5-20P 

XRM Series Glass Door Merchandiser

MODELS #XRM-49F-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	53 $\frac{1}{8}$ "W x 31 $\frac{7}{8}$ "D x 84 $\frac{3}{8}$ "H
Interior Dimensions	50"W x 28 $\frac{3}{8}$ "D x 61 $\frac{7}{8}$ "H
Net Volume	42.5 cu. ft.
Net Weight	437 lb.
Gross Weight	480 lb.
Packaging Dimensions	54 $\frac{1}{4}$ "W x 33"D x 84 $\frac{1}{2}$ "H

Construction

Exterior Material	Black Coated Steel
Interior Material	Painted Aluminum
Door Type	Glass Swing
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(8) 24 $\frac{3}{8}$ " x 23 $\frac{5}{8}$ "
Shelf Material	Plastic-Coated Steel
Shelf Load Capacity	90 lb.


Cooling

Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.5
Hz	60
Phase	1
Plug Type	NEMA 5-20P
Electrical Cord Length	96"

PLAN VIEW

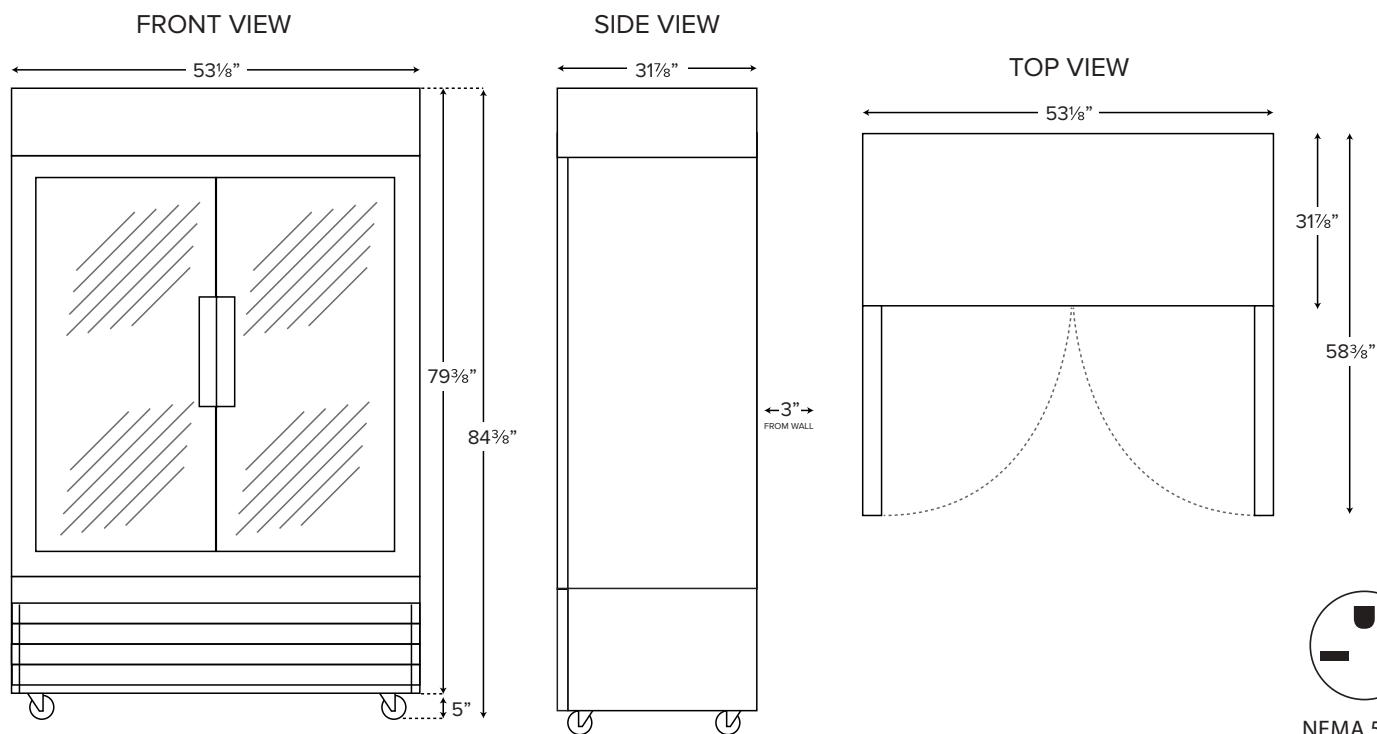

XRM Series

Glass Door Merchandiser



MODELS | #XRM-49S-HC

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

2 doors feature inside and outside tempered glass panes. Self-closing, sliding doors won't fog with use, ensuring clear product visibility at all times. Unlike swing doors, they don't require clearance outside the unit to open.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

8 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Two sliding glass doors
- Interior LED lighting
- (8) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Available in black or white powder-coated steel exterior
- Eco-friendly R290 hydrocarbon refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-49S-HC	2	8	53.1 1350	31.9 810	84.38 2144	49 1390	1/4+	115/60/1	4.3	5-15P 

XRM Series

Glass Door Merchandiser

MODELS | #XRM-49S-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	53⅜"W x 31⅞"D x 84⅜"H
Interior Dimensions	50"W x 28⅜"D x 61⅞"H
Net Volume	49 cu. ft.
Net Weight	437 lbs.
Gross Weight	480 lbs.
Packaging Dimensions	54¼"W x 33"D x 84½"H

Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass sliding
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(8) 24⅜" x 23⅝"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.


Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

Electrical

Voltage	115
Amps	4.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	96"

PLAN VIEW

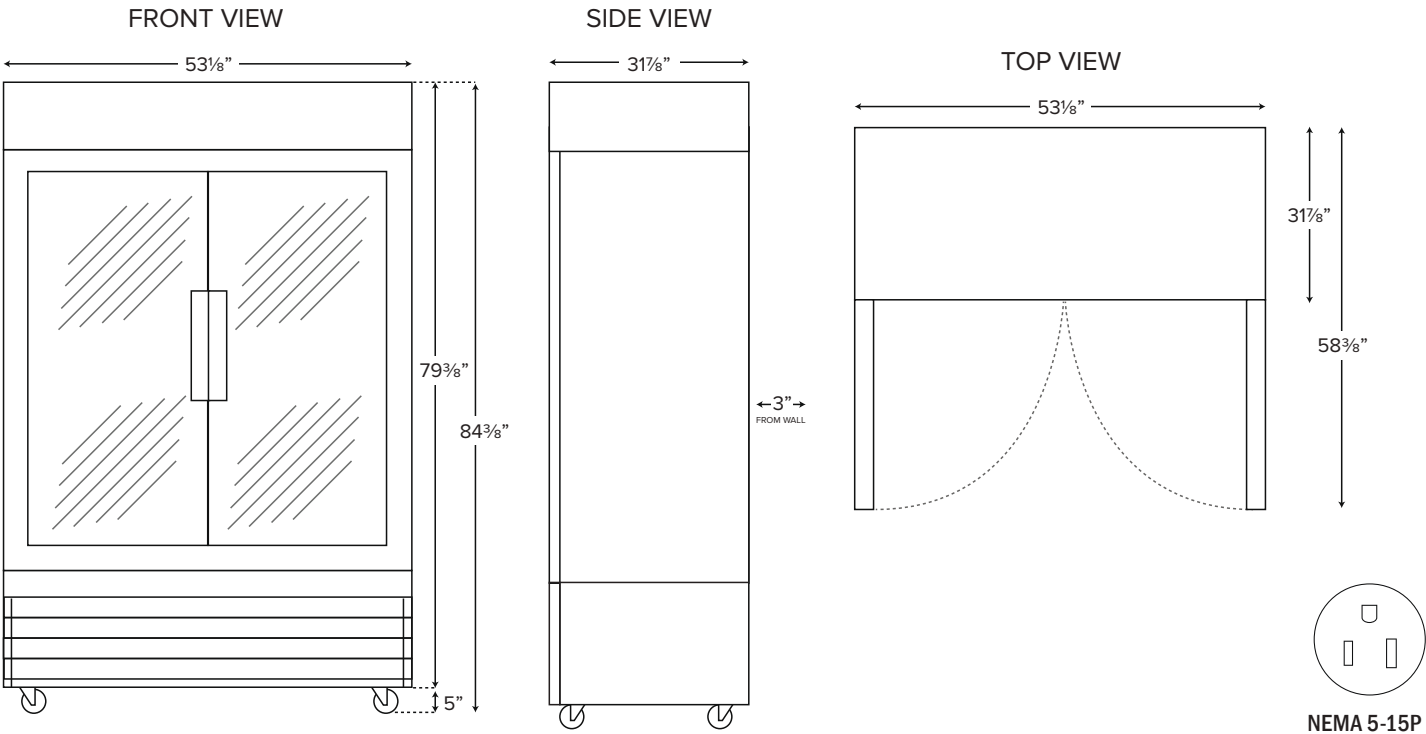

XRM Series

Glass Door Merchandiser



MODELS | #XRM-53-HC

XRM SERIES - GLASS DOOR REFRIGERATOR

Used for the merchandising and storage of hermetically sealed products for sale

CABINET CONSTRUCTION

Heavy duty construction includes white-coated aluminum interior walls and stainless steel floor. Exterior features peel and chip-resistant, powder-coated cold rolled steel that is durable and permanent.

LED lighted interior saves energy by producing less heat and maximizes product visibility in display area.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece grill is easily removed for cleaning and servicing.

Dual-pane tempered glass door self-closes to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance. “No stoop” lower shelf maximizes visibility by raising merchandised product to a higher level.

SHELVING

Twelve white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Convenient clean-out drain built into cabinet floor.

Easy to read digital controls.

SPECIAL FEATURES

- Three self-closing, anti-fog glass doors
- Interior LED lighting
- (12) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Available in black or white powder-coated steel exterior
- Eco-friendly R290 hydrocarbon refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XRM-53-HC	3	12	78.3 1988	30 760	85.75 2178	53 1500	3/4	115/60/1	10.7	5-15P 

XRM Series

Glass Door Merchandiser

MODELS | #XRM-53-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	78¼"W x 30"D x 80¾"H
Interior Dimensions	73½"W x 23⅝"D x 55⅞"H
Net Volume	57.5 cu. ft.
Net Weight	615 lbs.
Gross Weight	671 lbs.
Packaging Dimensions	81"W x 33¾"D x 87½"H

Cooling

Temperature Range	33°F-40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4



Construction

Exterior Material	Coated steel
Interior Material	Painted aluminum
Door Type	Glass swing
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(12) 23" x 23¼" + (4) 23" x 25¼"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	10.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

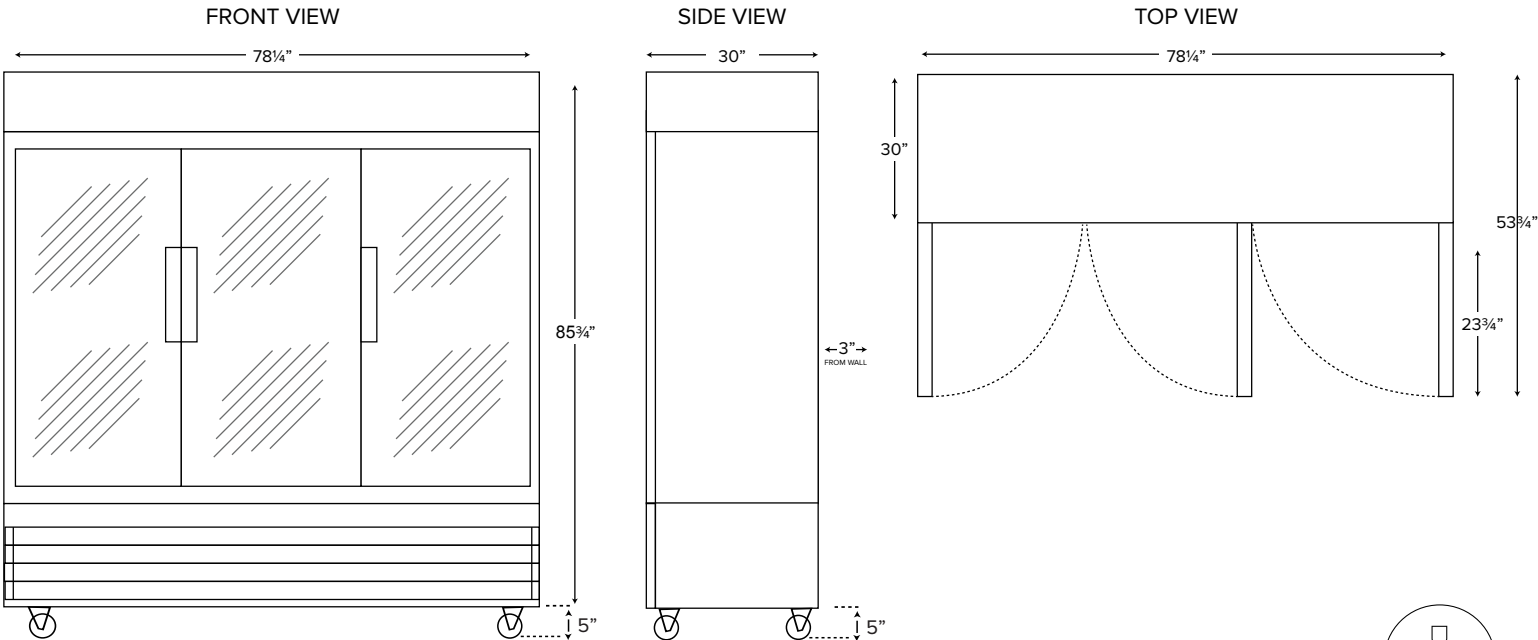

NEMA 5-15P

XPP Series

Pizza Prep Table



MODEL #XPP-2-HC

A SERIES - PIZZA PREP TABLE

Add prep space and cold ingredient storage.

CABINET CONSTRUCTION

Features 430 type stainless steel exterior and 304 stainless interior. Overall working height is 35¼”.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet. Insulated lid helps maintain safe product temperatures.

Full-length, 19⅞” deep cutting board for easy prep work.

Doors feature easy-to-use, recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally-safe R134a refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (9) ⅓ size, 6” deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Sleek, stainless steel exterior
- Interior maintains temperatures from 33-40°F
- Full length, 19⅞” deep cutting board
- Top holds up to (9) ⅓ size food pans up to 6” deep
- Insulated lids for better temperature retention
- Refrigerated base with (2) adjustable shelves included
- 115V, ⅓ hp, R290 refrigerant



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XPP-2-HC	2	2	70.9 1800	31.5 800	42.8 1088	16.9 477	1/5	115/60/1	3.42	5-15P 

XPP Series Pizza Prep Table

MODELS #XPP-2-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	71" W x 36.86" D x 42.5" H
Interior Dimensions	48.5" W x 27.1" D x 23" H
Working Height	35¼"
Cutting Board Dimensions	70⅝"W x 19⅞"D x ¾"H
Net Volume	17 cu. ft.
Net Weight	341 lb.
Gross Weight	420 lb.
Pan Capacity (Up to (9) 6" deep pans)	(9) ⅓ pans

Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	304 Series Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Shelves	(2)
Shelf Material	Epoxy-coated Steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	32°F - 41°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/3

Electrical

Voltage	115
Amps	9.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

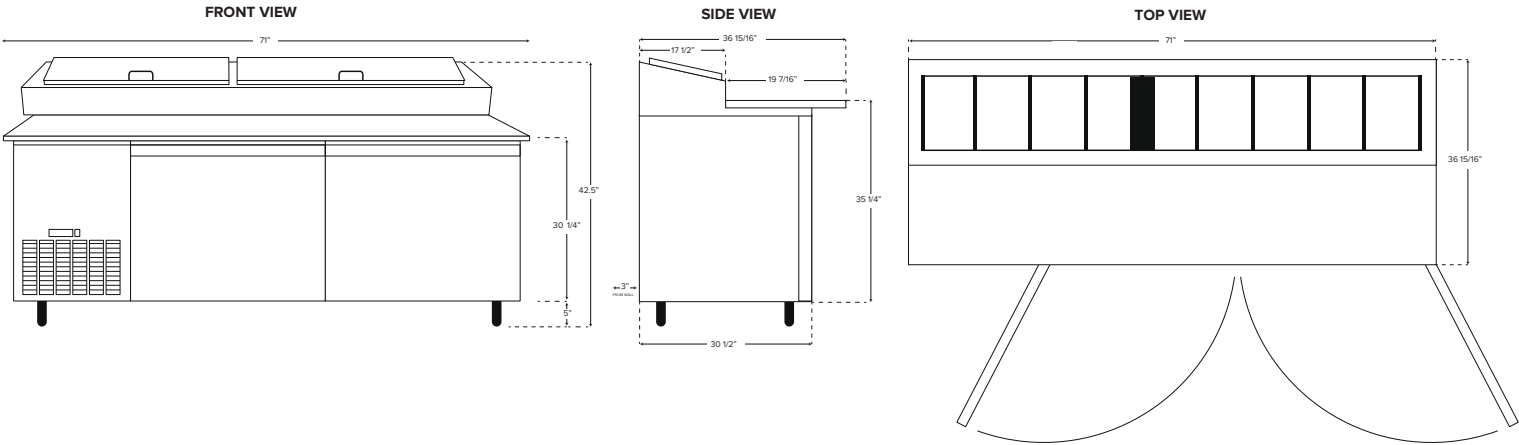

NEMA 5-15P

XSP Series

Salad/Sandwich Prep Table

MODEL #XSP-27-HC

Xiltek

XSP SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 10" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

1 epoxy-coated wire shelf accommodates up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (6) 1/6 size, 6" deep and (2) 1/9 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (6) 1/6 size and (2) 1/9 size, 6" deep food pans (sold separately)
- Full length, 3/4" thick, 10" deep cutting board for easy prep work
- Insulated lid helps maintain safe product temperatures
- Self-closing swing door with recessed full-length stainless steel handles
- 1 epoxy coated wire shelf
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 1/5 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-27-HC	1	1	27.5 698	29.5 750	42.3 1075	5.7 160	1/5	115/60/1	2.88	5-15P 

XSP Series Salad/Sandwich Prep Table

MODELS #XSP-27-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	27½"W x 31"D x 42⅜"H
Interior Dimensions	24"W x 23¾"D x 23½"H
Working Height	35¼"
Overall Height (Lid Open)	47¼"
Net Volume	6 cu. ft.
Net Weight	176 lb.
Gross Weight	231 lb.
Packaging Dimensions	31¾"W x 33¾"D x 45½"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(1) 17⅝" x 23½"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	5.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

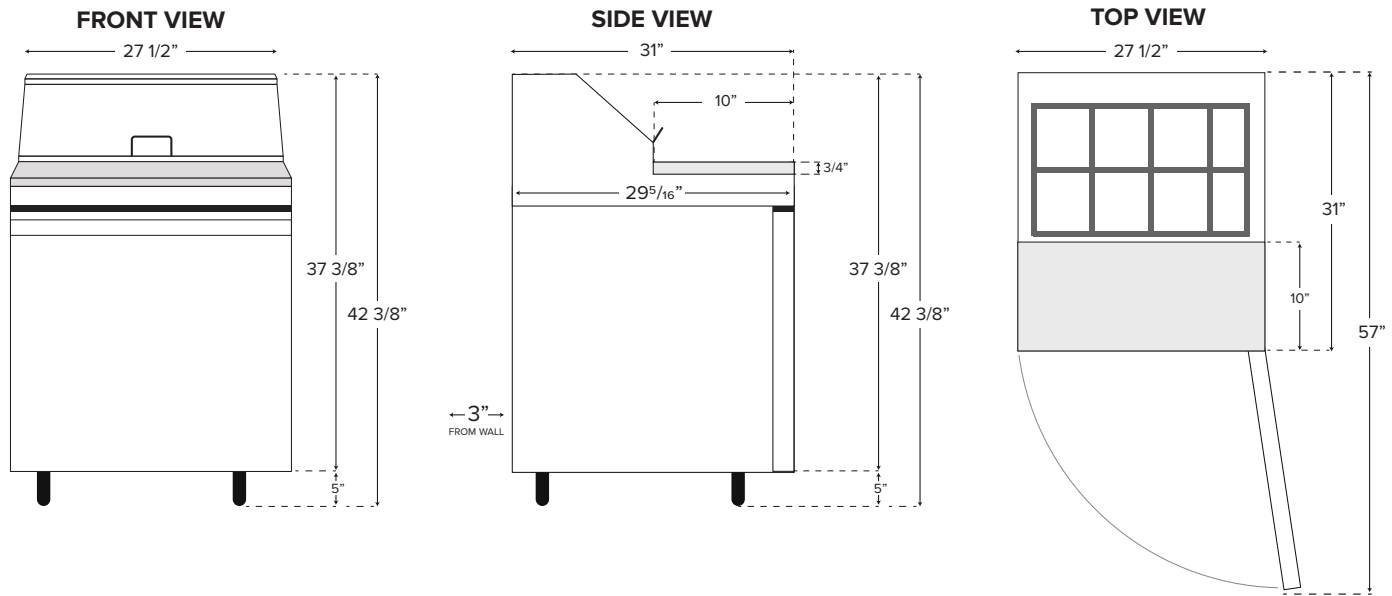

NEMA 5-15P



XSPM Series Salad/Sandwich Prep Table

MEGA TOP

MODEL #XSP-27M-HC

XSP-27M-HC SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 8" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

1 epoxy-coated wire shelf accommodates up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. Top pan rail holds up to (9) 1/6 size, 6" deep and (3) 1/9 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (9) 1/6 size and (3) 1/9 size, 6" deep food pans (sold separately)
- Full length, 3/4" thick, 8" deep cutting board for easy prep work
- Insulated lid helps maintain safe product temperatures
- Self-closing swing door with recessed full-length stainless steel handles
- 1 epoxy-coated wire shelf
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 1/5 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-27M-HC	1	1	27.5 698	34 864	45.9 1166	5.7 160	1/5	115/60/1	2.88	5-15P 

XSPM Series

Salad/Sandwich Prep Table

MEGA TOP

MODEL #XSP-27M-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	27½"W x 35"D x 45⅞"H
Interior Dimensions	24"W x 23¾"D x 23½"H
Working Height	35¼"
Overall Height (Lid Open)	51¾"
Net Volume	6 cu. ft.
Net Weight	187 lb.
Gross Weight	242 lb.
Packaging Dimensions	31¾"W x 39¼"D x 49"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5





Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(1) 17⅙" x 23½"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	5.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

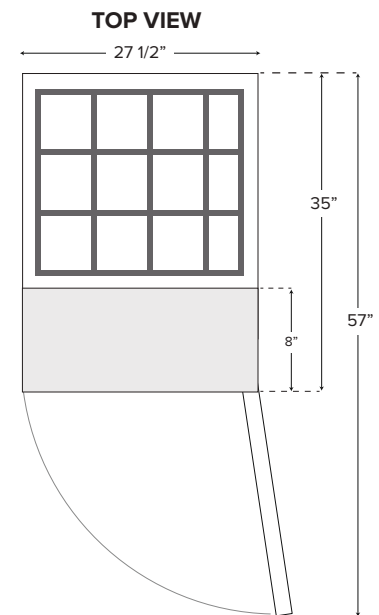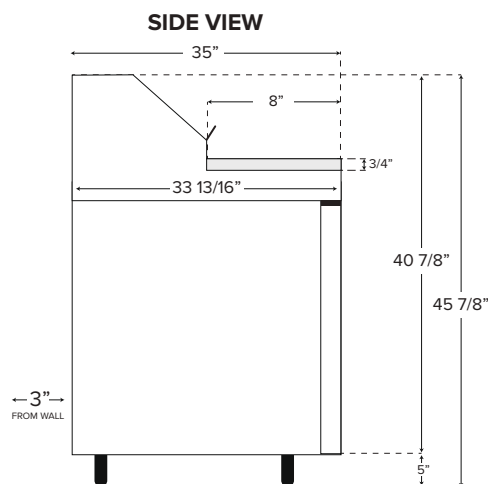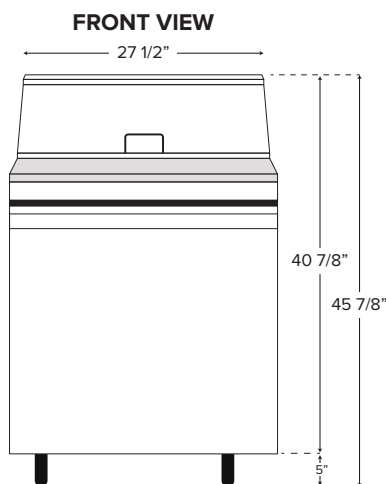

NEMA 5-15P

XSP Series

Salad/Sandwich Prep Table

MODEL #XSP-48-HC

Xiltek

XSP SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 11½" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (12) 1/6 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (12) 1/6 size, 6" deep food pans
- Insulated lid helps maintain safe product temperature
- Full length, 3/4" thick, 11 1/2" deep cutting board for easy prep work
- Double self-closing swing doors with recessed full-length stainless steel handles
- 2 epoxy-coated wire shelves
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 1/4 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-48-HC	2	2	46.8 1188	29.5 750	42.3 1075	9.5 268	1/4+	115/60/1	4.56	5-15P 

XSP Series

Salad/Sandwich Prep Table

MODELS #XSP-48-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	46¾"W x 31"D x 42⅜"H
Interior Dimensions	42⅞"W x 23¾"D x 23½"H
Working Height	35¼"
Overall Height (Lid Open)	47¼"
Net Volume	12 cu. ft.
Net Weight	297 lb.
Gross Weight	348 lb.
Packaging Dimensions	51"W x 33¾"D x 45½"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 20¾" x 17¼"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	7.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

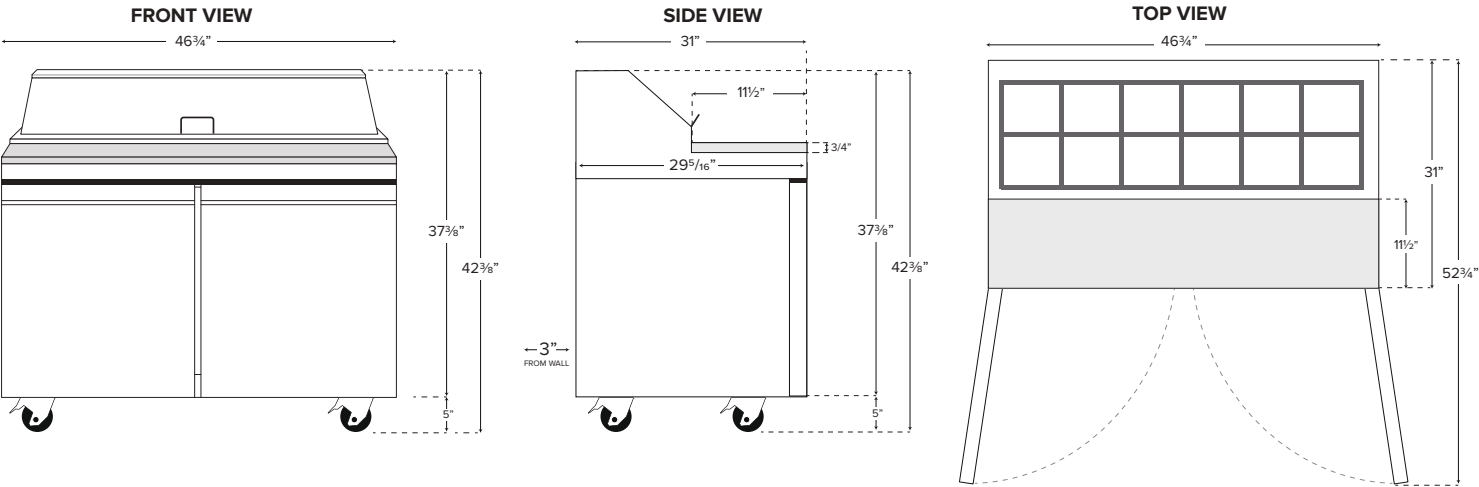

NEMA 5-15P



XSPM Series Salad/Sandwich Prep Table

MEGA TOP

MODEL #XSP-48M-HC

XSP-48M-HC SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 8" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (18) 1/6 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (18) 1/6 size, 6" deep food pans (sold separately)
- Full length, 3/4" thick, 8" deep cutting board for easy prep work
- Insulated lid helps maintain safe product temperatures
- Double self-closing swing doors with recessed full-length stainless steel handles
- 2 epoxy coated wire shelves
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 1/4 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-48M-HC	2	2	46.8 1188	34 864	45.9 1166	9.5 268	1/4+	115/60/1	4.56	5-15P 

XSPM Series

Salad/Sandwich Prep Table MEGA TOP

MODEL #XSP-48M-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	46¾"W x 35"D x 45⅞"H
Interior Dimensions	42⅞"W x 23¾"D x 23½"H
Working Height	35¼"
Overall Height (Lid Open)	51¾"
Net Volume	12 cu. ft.
Net Weight	319 lb.
Gross Weight	374 lb.
Packaging Dimensions	51"W x 39¼"D x 49"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 20¾" x 17⅙"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	7.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

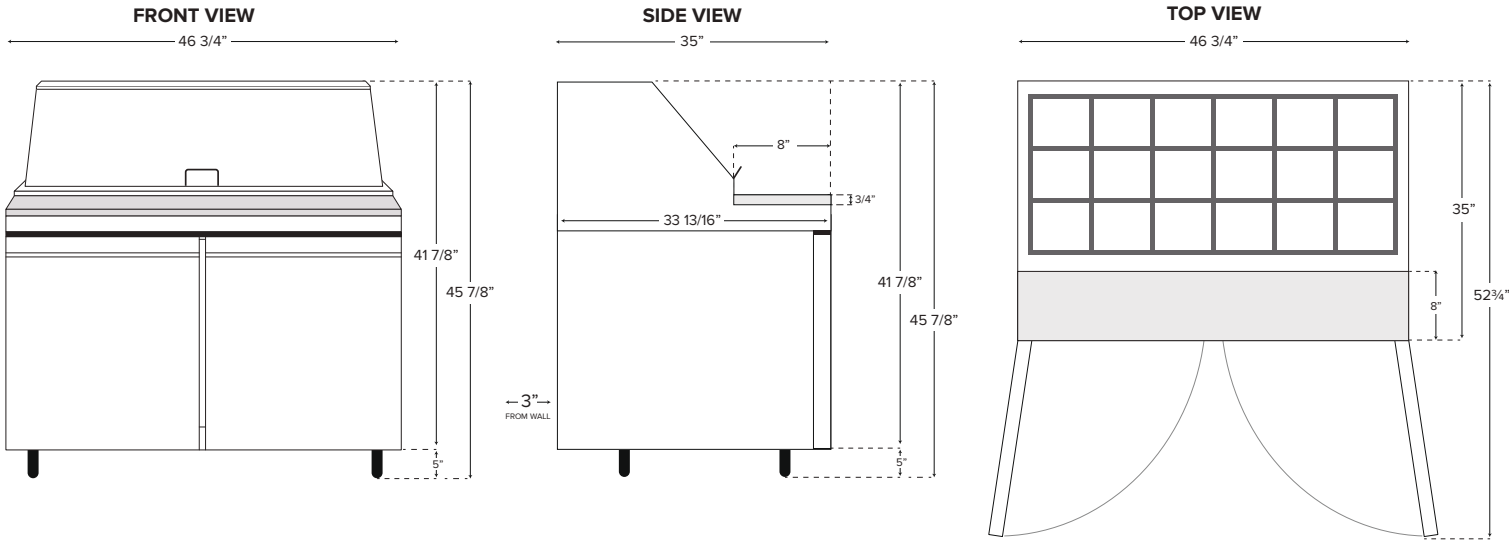

NEMA 5-15P



XSPM Series Salad/Sandwich Prep Table

MEGA TOP

MODEL #XSP-60M-HC

XSP-60M-HC SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 8" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (24) 1/6 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (24) 1/6 size, 6" deep food pans
- Full length, 3/4" thick, 8" deep cutting board for easy prep work
- Insulated lid helps maintain safe product temperatures
- Double self-closing swing doors with recessed full-length stainless steel handles
- 2 epoxy coated wire shelves
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 1/4 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-60M-HC	2	2	60.2 1529	34 864	45.9 1166	15 428	1/4+	115/60/1	4.8	5-15P 

XSPM Series

Salad/Sandwich Prep Table MEGA TOP



MODEL #XSP-60M-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	60¼"W x 35"D x 45⅞"H
Interior Dimensions	56¼"W x 23¾"D x 23½"H
Working Height	35¼"
Overall Height (Lid Open)	51¾"
Net Volume	15 cu. ft.
Net Weight	385 lb.
Gross Weight	451 lb.
Packaging Dimensions	64½"W x 39¼"D x 49"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 27⅞" x 17⅛"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	7.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

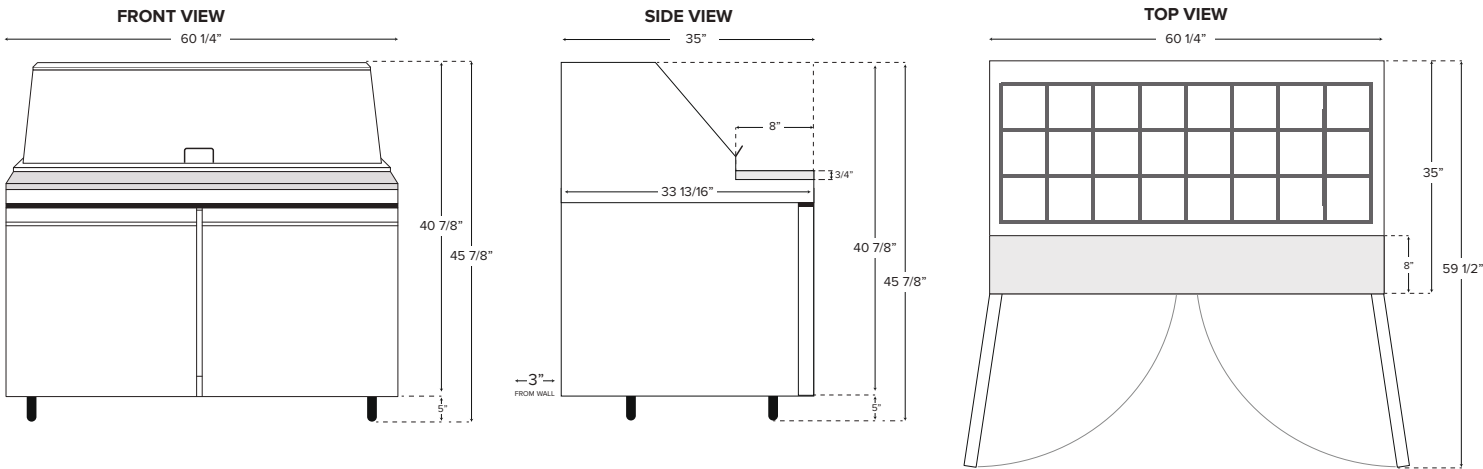

NEMA 5-15P

XSP Series

Salad/Sandwich Prep Table



MODEL #XSP-72-HC

XSP SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 11½" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

3 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (18) 1/6 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Top holds up to (18) 1/6 size, 6" deep food pans
- Full length, 3/4" thick, 11 1/2" deep cutting board for easy prep work
- Insulated lid helps maintain safe product temperatures
- Three self-closing swing doors with recessed full-length stainless steel handles
- 3 epoxy coated wire shelves
- 430 type stainless steel exterior and 304 type stainless steel interior
- Digital temperature controls hold at 33-40°F
- 115V, 3/4 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-72-HC	3	3	70.4 1787	29.5 750	42.3 1075	15.5 440	3/4	115/60/1	8.9	5-15P 

XSP Series

Salad/Sandwich Prep Table

MODELS #XSP-72-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	70 ³ / ₈ "W x 31"D x 42 ³ / ₈ "H
Interior Dimensions	66 ¹ / ₂ "W x 23 ³ / ₄ "D x 23 ¹ / ₂ "H
Working Height	35 ¹ / ₄ "
Overall Height (Lid Open)	47 ¹ / ₄ "
Net Volume	18 cu. ft.
Net Weight	506 lb.
Gross Weight	583 lb.
Packaging Dimensions	74 ³ / ₄ "W x 33 ³ / ₄ "D x 45 ¹ / ₂ "H

Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(3) 21 ⁵ / ₈ " x 17 ¹ / ₁₆ "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.



Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4

Electrical

Voltage	115
Amps	8.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

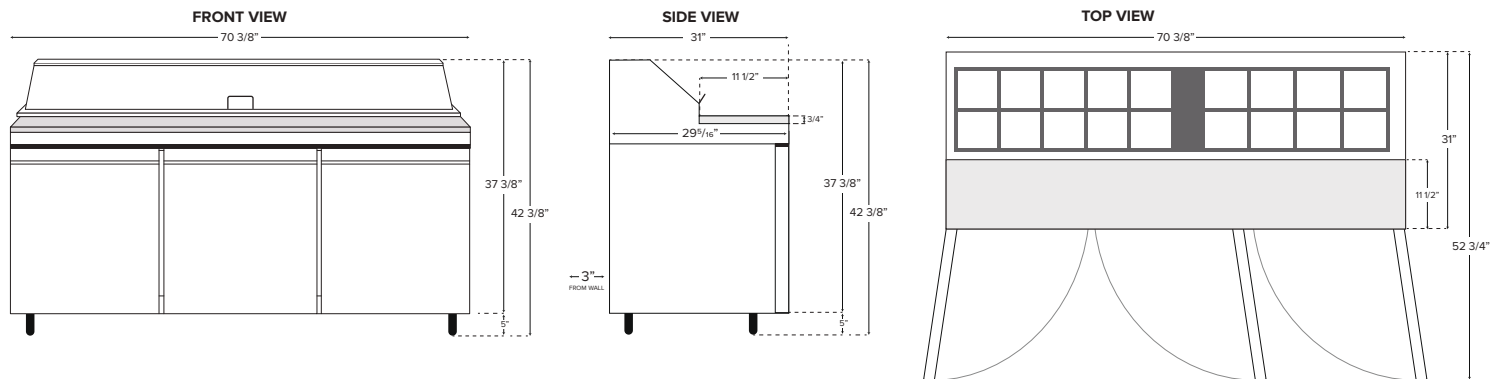

NEMA 5-15P



XSPM Series Salad/Sandwich Prep Table

MEGA TOP

MODEL #XSP-72M-HC

XSP-72M-HC SERIES - SANDWICH & SALAD PREP

Ample prep space to create subs, salads, and sandwiches with convenient cold ingredient storage

CABINET CONSTRUCTION

Heavy duty construction includes 430 type stainless steel exterior with a 304 type stainless steel interior and an overall 35¼" working height.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated lid helps maintain safe product temperatures.

Full length, 8" deep cutting board for easy prep work.

Easy-to-use recessed full-length stainless steel handles. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

3 epoxy-coated wire shelves accommodate up to 90 lb. each.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function.

Top pan rail holds up to (30) 1/6 size, 6" deep food pans. Pan rail is air cooled from the bottom.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Accommodates (30) 1/6 size, 6" deep food pans (sold separately)
- 430 type stainless steel exterior and 304 type stainless steel interior
- Full length, 3/4" thick, 8" deep cutting board for easy prep work
- Three self-closing swing doors with recessed full-length stainless steel handles
- Maintains a food safe temperature range of 33-40°F
- Easy-to-read digital temperature controller
- Includes convenient auto-defrost feature
- Foamed-in-place polyurethane insulation
- 115V, 3/4 hp
- Pan rail is air cooled from the bottom



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XSP-72M-HC	3	3	70.4 1787	34 864	45.9 1166	15.5 440	3/4	115/60/1	8.9	5-15P 

XSPM Series

Salad/Sandwich Prep Table MEGA TOP



MODEL #XSP-72M-HC

TECHNICAL DATA

Dimensions

Exterior Dimensions	70 ³ / ₈ "W x 35"D x 45 ⁷ / ₈ "H
Interior Dimensions	66 ¹ / ₂ "W x 23 ³ / ₄ "D x 23 ¹ / ₂ "H
Working Height	35 ¹ / ₄ "
Overall Height (Lid Open)	51 ³ / ₄ "
Net Volume	18 cu. ft.
Net Weight	528 lb.
Gross Weight	605 lb.
Packaging Dimensions	74 ³ / ₄ "W x 39 ¹ / ₄ "D x 49"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/4



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(3) 21 ⁵ / ₈ " x 17 ¹ / ₁₆ "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	8.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

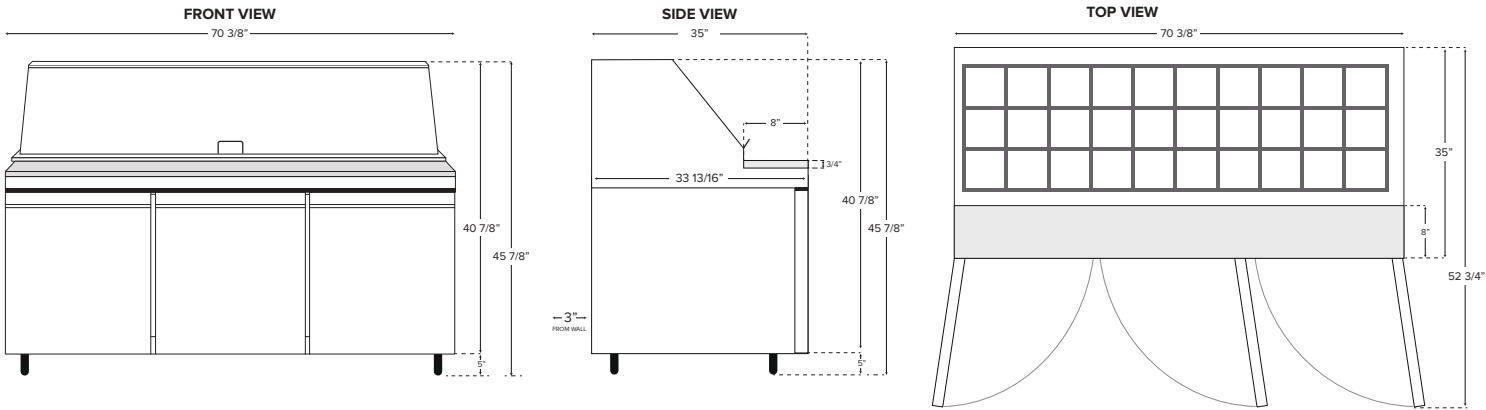

NEMA 5-15P

XCB Series

Chef Base

MODEL #XCB-36-HC

CABINET CONSTRUCTION

Sturdy and corrosion-resistant design features both a 430 type stainless steel exterior and interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and promotes energy efficiency.

1¾" thick stainless steel top surface features raised marine edges to help contain spills and leaks. Accommodates up to 880 lb. of weight.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

DRAWERS

2 refrigerated drawers can each accommodate 1 full size, 4" deep and (3) 1/6 size, 4" deep food pans.

MODEL FEATURES

Digital temperature controller makes operation simple.

Auto defrost feature for intuitive cleaning and maintenance.

Outfitted with (4) 4" casters for mobility prior to cleaning and servicing tasks.



★ Conforms to UL & NSF-7 Standards

Xiltek

XBC SERIES

A practical storage and productivity solution for busy kitchens.

SPECIAL FEATURES

- 1¾" thick stainless steel top with marine edges to contain spills
- Top accommodates up to 880 lb. of weight
- 2 refrigerated drawers for food storage
- Digital temperature controls hold at 33-40°F
- Temperature display for easy monitoring
- Foamed-in-place polyurethane insulation
- Environmentally-friendly R290 refrigerant
- 430 type stainless steel interior and exterior
- Auto defrost feature
- 1/6 hp compressor



Model	Drawers	GN Pans	Cabinet Dimensions (inches) (mm)			CAP. CU.FT LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XCB-36-HC	2	2*1/1+6*1/6	36 3/8 924	32 1/8 816	25 3/8 645	5.9 167	1/6	115/60/1	2.52	5-15P 

XCB Series

Chef Base

MODELS #XCB-36-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	36 ³ / ₈ "W x 32 ¹ / ₈ "D x 25 ⁷ / ₈ "H
Interior Dimensions	24 ⁵ / ₈ "W x 27 ¹ / ₂ "D x 16 ¹ / ₂ "H
Number of Drawers	2
4" Deep Pan Capacity (Per Drawer)	(1) Full + (3) ¹ / ₆
Top Thickness	1 ³ / ₄ "
Net Volume	6.5 cu. ft.
Net Weight	174 lb.
Gross Weight	218 lb.
Packing Dimensions	39"W x 35"D x 28 ¹ / ₂ "H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Horsepower	1/6



Construction

Exterior Material	Type 430 Stainless Steel
Top Material	Type 430 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Top Edge	Marine
Weight Capacity	880 lb.
Drawer Capacity	132 lb.

Electrical

Voltage	115
Amps	2.5
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

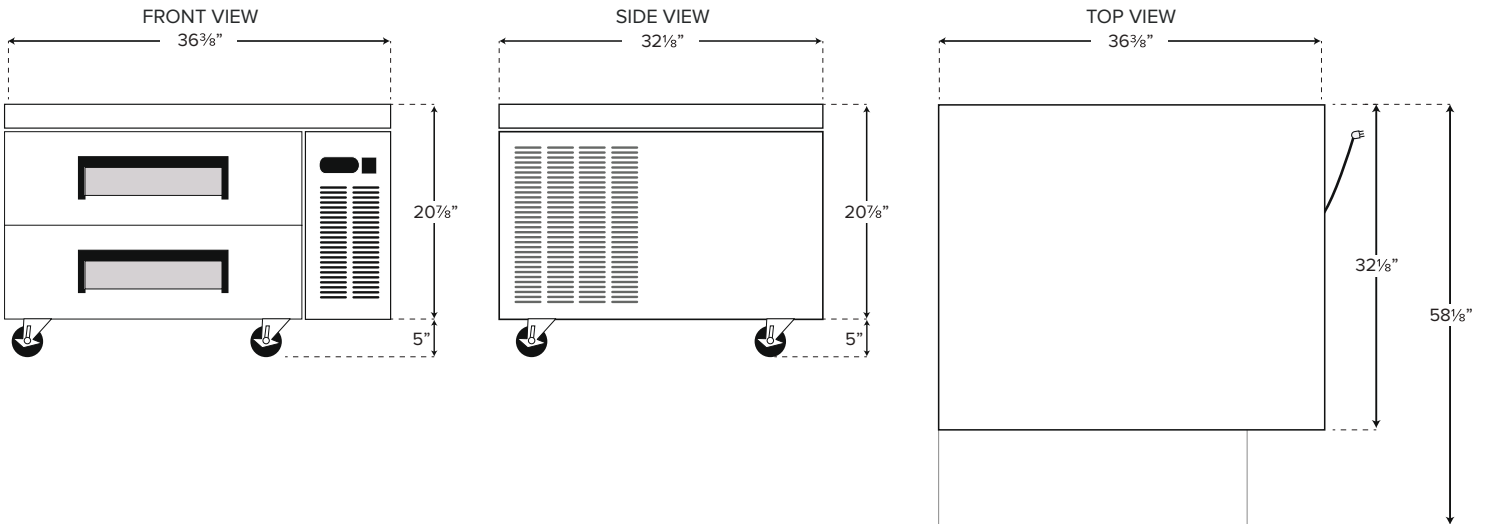

NEMA 5-15P

XCB Series

Chef Base

MODEL #XCB-52-HC

CABINET CONSTRUCTION

Sturdy and corrosion-resistant design features both a 430 type stainless steel exterior and interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and promotes energy efficiency.

1¾" thick stainless steel top surface features raised marine edges to help contain spills and leaks. Accommodates up to 990 lb. of weight.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

DRAWERS

2 refrigerated drawers can each accommodate 3 full size, 4" deep food pans.

MODEL FEATURES

Digital temperature controller makes operation simple.

Auto defrost feature for intuitive cleaning and maintenance.

Outfitted with (4) 4" casters for mobility prior to cleaning and servicing tasks.



★ Conforms to UL & NSF-7 Standards

Xiltek

XBC SERIES

A practical storage and productivity solution for busy kitchens.

SPECIAL FEATURES

- 1¾" thick stainless steel top with marine edges to contain spills
- Top accommodates up to 990 lb. of weight
- 2 refrigerated drawers for food storage
- Digital temperature controls hold at 33-40°F
- Temperature display for easy monitoring
- Foamed-in-place polyurethane insulation
- Environmentally-friendly R290 refrigerant
- 430 type stainless steel interior and exterior
- Auto defrost feature
- 1/6 hp compressor



Model	Drawers	GN Pans	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XCB-52-HC	2	6*1/1	51 7/8 1318	32 1/8 816	25 3/8 645	9.9 280	1/6	115/60/1	3.48	5-15P 

XCB Series

Chef Base

MODELS #XCB-52-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	51 $\frac{7}{8}$ "W x 32 $\frac{1}{8}$ "D x 25 $\frac{7}{8}$ "H
Interior Dimensions	40 $\frac{1}{8}$ "W x 27 $\frac{1}{2}$ "D x 16 $\frac{1}{2}$ "H
Number of Drawers	2
4" Deep Pan Capacity (Per Drawer)	(3) Full
Top Thickness	1 $\frac{3}{4}$ "
Net Volume	10.5 cu. ft.
Net Weight	233 lb.
Gross Weight	279 lb.
Packing Dimensions	54 $\frac{1}{2}$ "W x 35"D x 28 $\frac{1}{2}$ "H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Horsepower	1/6



Construction

Exterior Material	Type 430 Stainless Steel
Top Material	Type 430 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Top Edge	Marine
Weight Capacity	990 lb.
Drawer Capacity	132 lb.

Electrical

Voltage	115
Amps	3.5
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

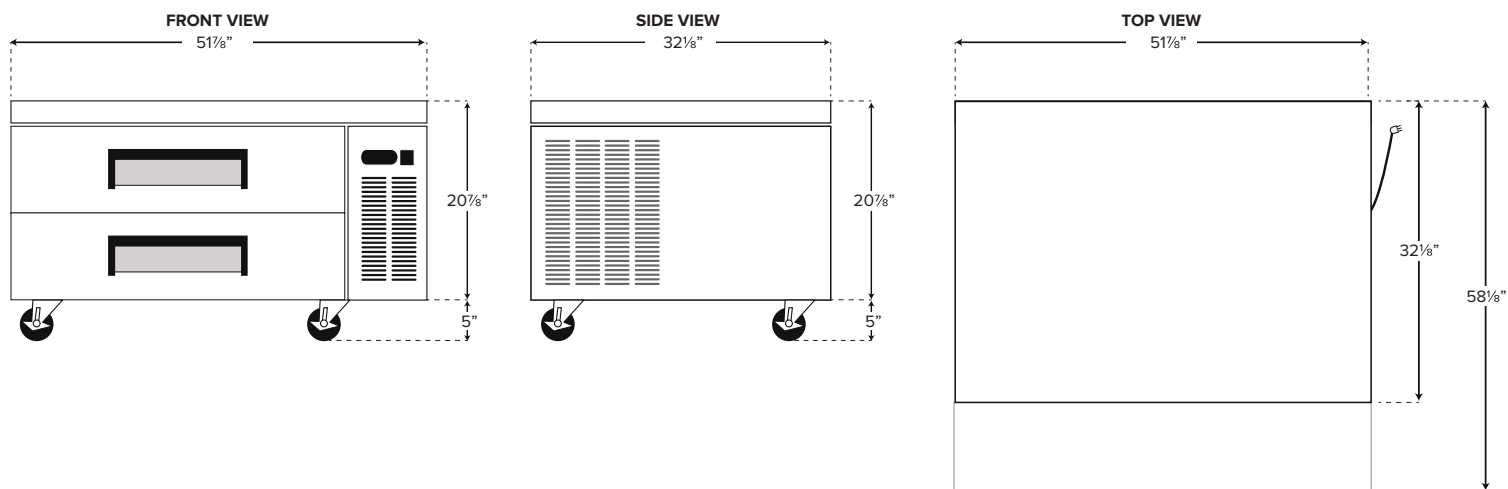

NEMA 5-15P

XCB Series

Chef Base

MODEL #XCB-72-HC

CABINET CONSTRUCTION

Sturdy and corrosion-resistant design features both a 430 type stainless steel exterior and interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and promotes energy efficiency.

1¾" thick stainless steel top surface features raised marine edges to help contain spills and leaks. Accommodates up to 1100 lb. of weight.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

DRAWERS

4 refrigerated drawers can each accommodate 2 full size, 4" deep food pans.

MODEL FEATURES

Digital temperature controller makes operation simple.

Auto defrost feature for intuitive cleaning and maintenance.

Outfitted with (4) 4" casters for mobility prior to cleaning and servicing tasks.



Xiltek

XBC SERIES

A practical storage and productivity solution for busy kitchens.

SPECIAL FEATURES

- 1¾" thick stainless steel top with marine edges to contain spills
- Top accommodates up to 1100 lb. of weight
- 4 refrigerated drawers for food storage
- Digital temperature controls hold at 33-40°F
- Temperature display for easy monitoring
- Foamed-in-place polyurethane insulation
- Environmentally-friendly R290 refrigerant
- 430 type stainless steel interior and exterior
- Auto defrost feature
- 1/5 hp compressor



Model	Drawers	GN Pans	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XCB-72-HC	4	8*1/1	72 3/8 1839	32 1/8 816	25 3/8 645	15 425	1/5	115/60/1	4.68	5-15P 

XCB Series

Chef Base

MODELS #XCB-72-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	72 ³ / ₈ "W x 32 ¹ / ₈ "D x 25 ⁷ / ₈ "H
Interior Dimensions	60 ⁵ / ₈ "W x 27 ¹ / ₂ "D x 16 ¹ / ₂ "H
Number of Drawers	4
4" Deep Pan Capacity (Per Drawer)	(2) Full
Top Thickness	1 ³ / ₄ "
Net Volume	15 cu. ft.
Net Weight	275 lb.
Gross Weight	321 lb.
Packing Dimensions	75"W x 35"D x 28 ¹ / ₂ "H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Type 430 Stainless Steel
Top Material	Type 430 Stainless Steel
Insulation Material	Foamed-in-place Polyurethane
Top Edge	Marine
Weight Capacity	1100 lb.

Electrical

Voltage	115
Amps	4.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

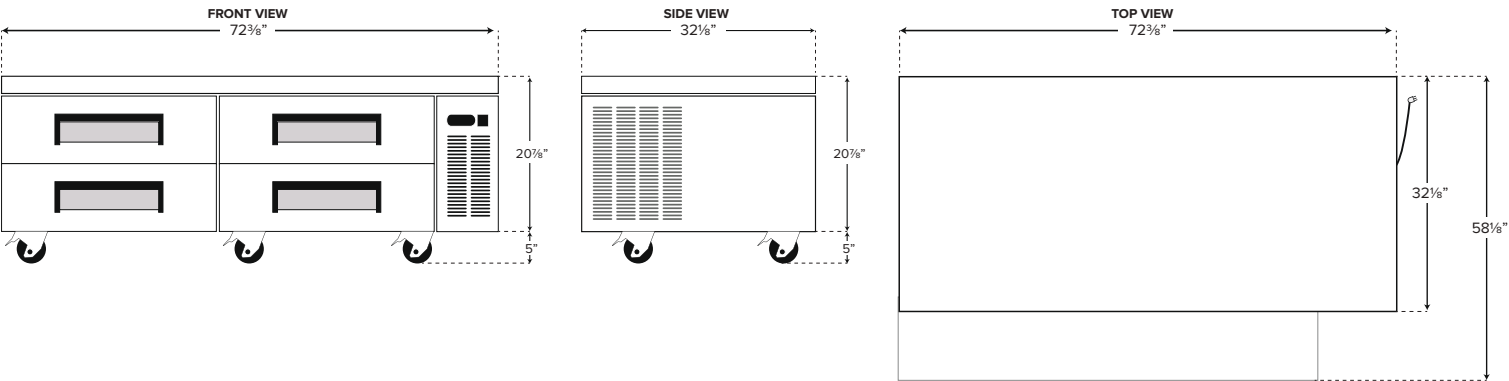

NEMA 5-15P

XBC Series

Horizontal Bottle Coolers

MODEL #XBC-65-HC

XBC SERIES - HORIZONTAL BOTTLE COOLERS

Keep plenty of cold canned and bottled beverages on hand

CABINET CONSTRUCTION

Heavy duty construction includes black plastic coated steel exterior with painted aluminum interior. Stainless steel locking lids and countertop surface.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated locking lid helps maintain safe product temperatures.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

SHELVING

3 epoxy-coated steel dividers included.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. Included bottle opener with removable cap catcher makes service convenient. Locking stainless steel lids protects contents during off hours.



SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Durable black coated steel exterior; painted aluminum interior
- Maintains temperatures from 33 to 40°F
- Spacious 17.5 cu. ft. interior features 3 epoxy coated steel dividers
- Includes 2 locking lids and comes with a bottle opener/cap catcher
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/6 hp



Model	Lids	Cabinet Dimensions (inches / mm)			Capacity		HP	Voltage	Amps	NEMA Config.
		L	D	H	12 oz. Blts	12 oz. Cans				
XBC-65-HC	2	64 1/2 1638	26 5/8 677	34 1/4 869	22 Cases	32 Cases	1/6	115/60/1	2.6	5-15P 

XBC Series

Horizontal Bottle Coolers

MODEL #XBC-65HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	64½"W x 28"D x 34¼"H
Interior Dimensions	60⅜"W x 23"D x 26"H
Net Volume	17.5 cu. ft.
Net Weight	254 lb.
Gross Weight	297 lb.
Packaging Dimensions	70"W x 32¾"D x 41¾"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/6



Construction

Exterior Material	Black Coated Steel
Interior Material	Painted Aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 23" x 26"
Shelf Material	Epoxy Coated Steel

Electrical

Voltage	115
Amps	2.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

PLAN VIEW

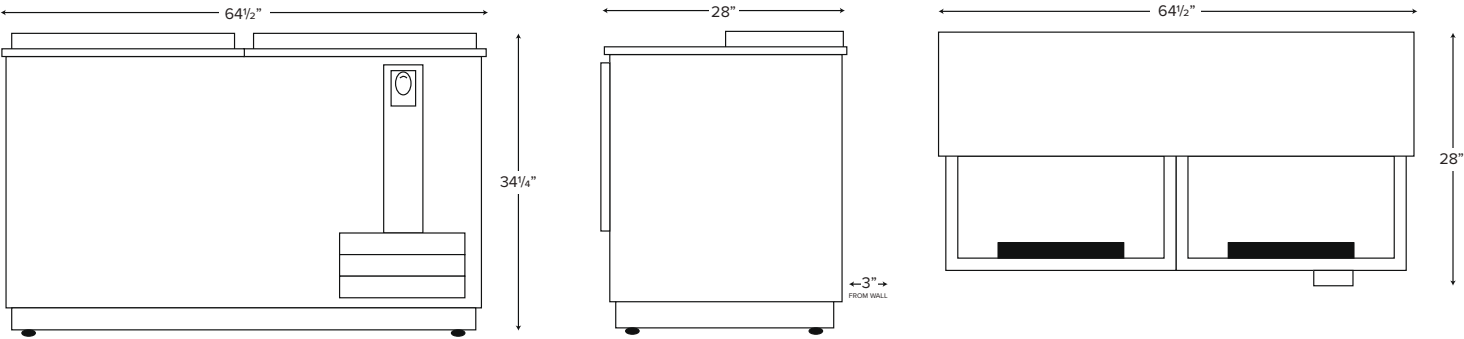

NEMA 5-15P

XBC Series

Horizontal Bottle Coolers

MODEL #XBC-95-HC

Xiltek

XBC SERIES - HORIZONTAL BOTTLE COOLERS

Keep plenty of cold canned and bottled beverages on hand

CABINET CONSTRUCTION

Heavy duty construction includes black plastic coated steel exterior with painted aluminum interior. Stainless steel locking lids and countertop surface.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. Insulated locking lid helps maintain safe product temperatures.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

SHELVING

3 epoxy-coated steel dividers included.

MODEL FEATURES

Preprogrammed digital controller features auto-defrost function. Included bottle opener with removable cap catcher makes service convenient. Locking stainless steel lids protects contents during off hours.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Durable black coated steel exterior; painted aluminum interior
- Maintains temperatures from 33 to 40°F
- Spacious 26.6 cu. ft. interior features 3 epoxy-coated dividers
- Includes 3 locking lids and comes with 2 removable bottle opener / cap catchers
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/4 hp



Model	Lids	Cabinet Dimensions (inches / mm)			Capacity		HP	Voltage	Amps	NEMA Config.
		L	D	H	12 oz. Blts	12 oz. Cans				
XBC-95-HC	3	95 1/4 2418	26 5/8 677	34 1/4 869	37.5 Cases	55 Cases	1/4+	115/60/1	4.2	5-15P 

XBC Series Horizontal Bottle Coolers

MODEL #XBC-95-HC

Xiltek

TECHNICAL DATA

Dimensions

Exterior Dimensions	95¼"W x 28"D x 34¼"H
Interior Dimensions	91⅞"W x 23"D x 26"H
Net Volume	26.6 cu. ft.
Net Weight	386 lb.
Gross Weight	429 lb.
Packaging Dimensions	100½"W x 32¾"D x 41¾"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Coated Steel
Interior Material	Painted Aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(3) 23" x 26"
Shelf Material	Epoxy Coated Steel

Electrical

Voltage	115
Amps	4.2
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

PLAN VIEW

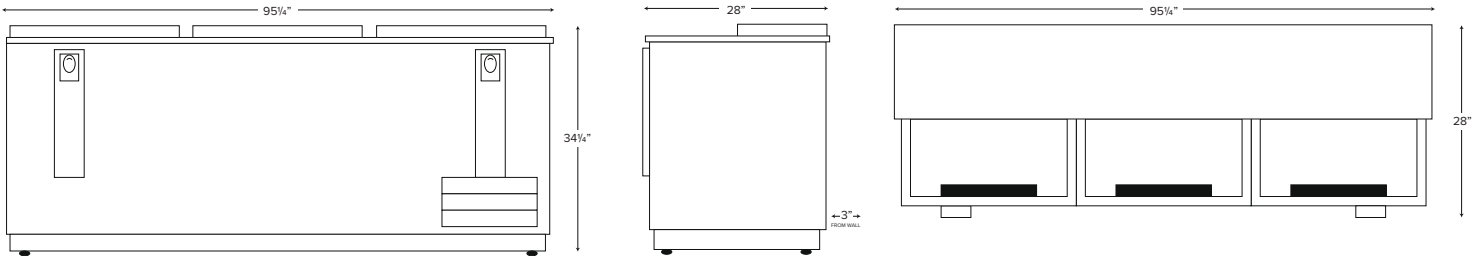

NEMA 5-15P

XGF Series

Glass Froster

Xiltek

MODEL #XGF-50-HC

GF SERIES - GLASS FROSTER

Frost craft beer glasses or cool plates before service.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a white painted aluminum interior. Stainless steel sliding door for easy access. Door lock protects contents inside.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant.

SHELVING

8 epoxy-coated steel shelves included to hold plates or glasses.

MODEL FEATURES

Digital controller features auto-defrost function. Not intended for the storage or display of perishable materials.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 8 epoxy-coated steel shelves for glasses or plates
- Sliding stainless steel door for easy access
- Maintains temperatures between -5 and -2°F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black coated steel exterior
- Painted aluminum interior
- Auto defrost for easy maintenance
- 115V, 1/4 hp



XGF Series

Glass Froster

MODEL #XGF-50-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	50"W x 28½"D x 33"H
Interior Dimensions	45"W x 23"D x 26"H
Net Volume	12.2 cu. ft.
Net Weight	181 lb.
Gross Weight	224 lb.
Packaging Dimensions	54"W x 30"D x 42"H

Cooling

Temperature Range	-5 - 2°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4



Construction

Exterior Material	Black Plastic Coated Steel
Interior Material	Painted Aluminum
Insulation Material	Foamed-In-Place polyurethane
Shelves	(6) 15" x 10" and (2) 14⅜" x 22⅝"
Shelf Material	Epoxy Coated Steel
Shelf Load Capacity	55 lb.

Electrical

Voltage	115
Amps	5.3
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	90"

PLAN VIEW

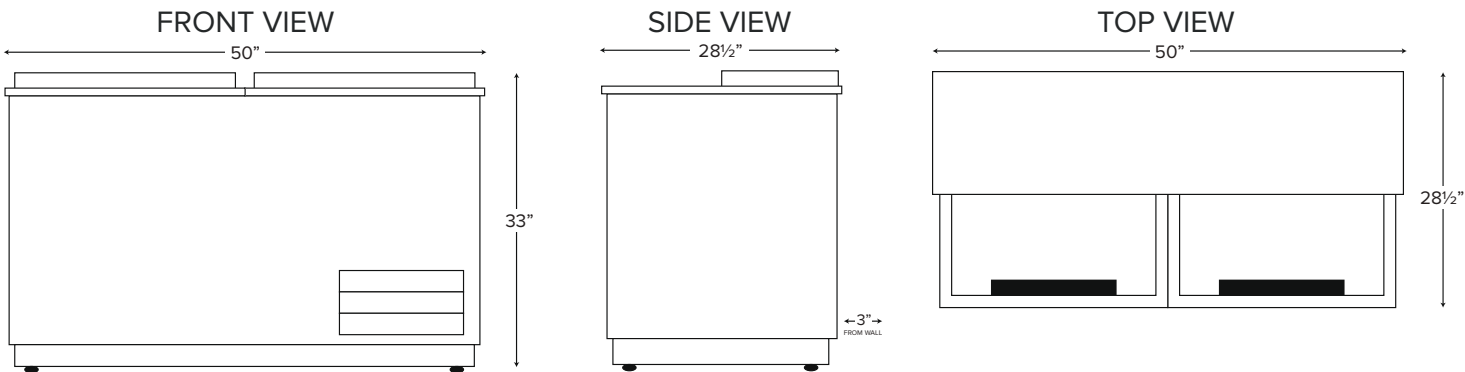

NEMA 5-15P

XUC Series

Undercounter Freezer

MODELS #XUC-27F-HC

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

Door features easy-to-use recessed handles for quick interior access. Door stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.



★ Conforms to UL & NSF-7 Standards

Xiltek

XUC SERIES - UNDERCOUNTER FREEZER

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from (-8)°F - (-1)°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-de-frost function
- 115V; 1/4hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-27F-HC	1	1	27 685	29 1/2 750	35 1/4 895	6.3 177	1/5	115/60/1	2.1	5-15P 

XUC Series

Undercounter Freezer



MODELS #XUC-27F-HC



TECHNICAL DATA

Width	27 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Interior Width	22 1/4 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Amps	2.1 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	881
Capacity	6.3 cu. ft.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Hinge Location	Right
Horsepower	1/5 HP
Number of Doors	1
Number of Shelves	1 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	-8 -- 1 Degrees F
Type	Freezers

PLAN VIEW

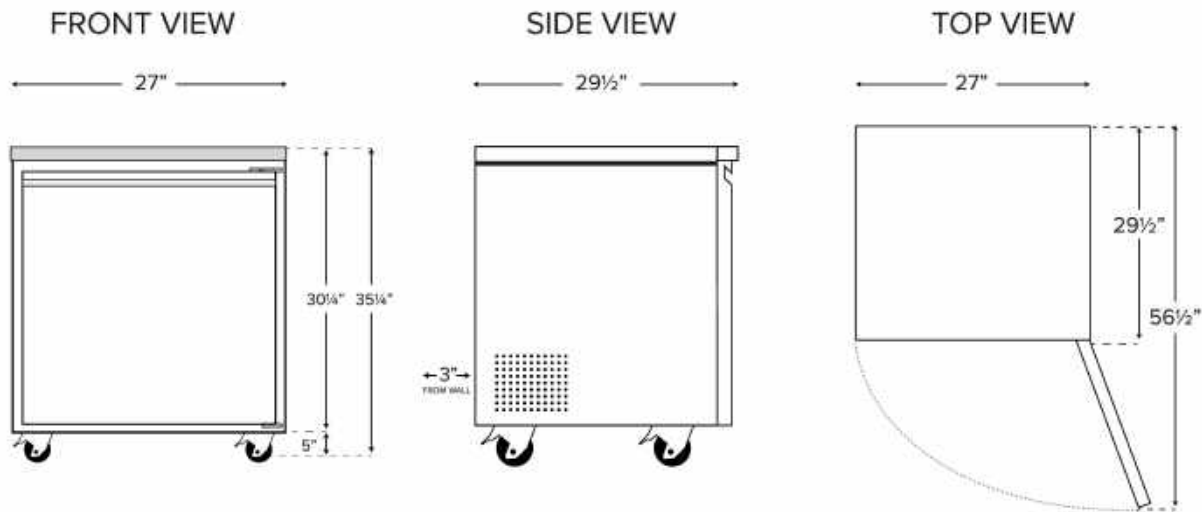

NEMA 5-15P

XUC Series

Undercounter Refrigerator

MODELS #XUC-27R-HC



CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. One-piece rear grill is easily removed for cleaning and servicing. Door features easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

A white epoxy-coated steel shelf included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion. Interior wall-mounted thermometer for easy temperature monitoring. Preprogrammed digital controller features auto-defrost function.

XUC SERIES - UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from 33°F - 40°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/5hp



★ Conforms to UL & NSF-7 Standards

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-27R-HC	1	1	27 685	29 1/2 750	35 1/4 895	6.3 177	1/6	115/60/1	1.9	5-15P 

XUC Series

Undercounter Refrigerator



MODELS #XUC-27R-HC



TECHNICAL DATA

Width	27 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Interior Width	22 1/4 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Amps	1.9 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	666
Capacity	6.3 cu. ft.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Features	Self-Closing Doors
Hinge Location	Right
Horsepower	1/6 HP
Number of Doors	1
Number of Shelves	1 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

PLAN VIEW

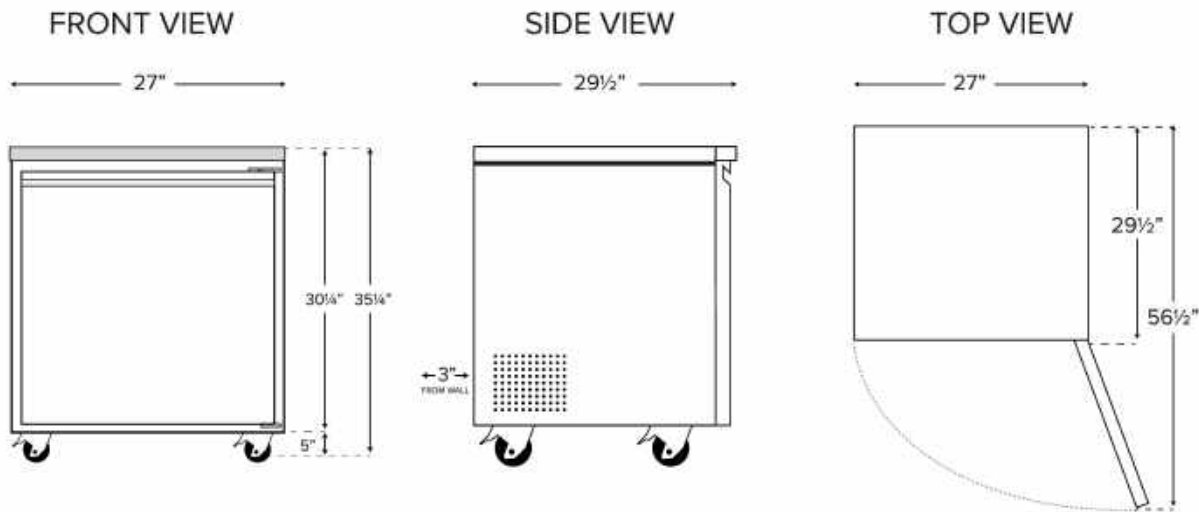

NEMA 5-15P

XUC Series Undercounter Freezer

MODELS #XUC-48F-HC

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

2 doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.



★ Conforms to UL & NSF-7 Standards



XUC SERIES - UNDERCOUNTER FREEZER

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from (-8)°F - (-1)°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-de-frost function
- 115V; 1/4hp



Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-48F-HC	2	2	47 1/4 1200	29 1/2 750	35 1/4 895	12 338	1/4+	115/60/1	4.5	5-15P 

XUC Series

Undercounter Freezer



MODELS #XUC-48F-HC

Xiltek

TECHNICAL DATA

Width	47 1/4 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Interior Width	42 1/2 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Amps	4.5 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	1264
Capacity	12 cu. ft.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Hinge Location	Left/Right
Horsepower	1/4 HP
Number of Doors	2
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	-8 -- -1 Degrees F
Type	Freezers

PLAN VIEW

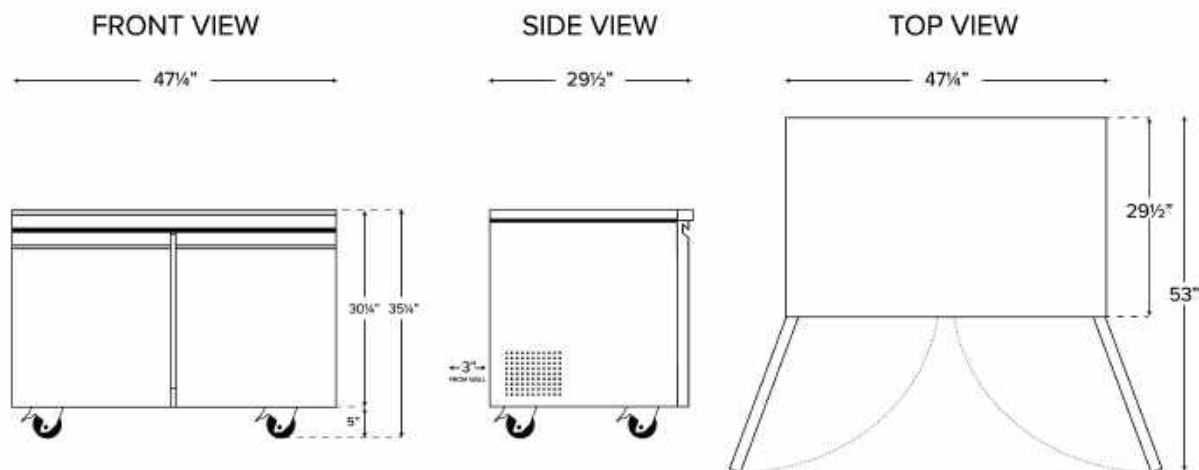

NEMA 5-15P

XUC Series

Undercounter Refrigerator

MODELS #XUC-48R-HC



CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency. One-piece rear grill is easily removed for cleaning and servicing. 2 doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion. Interior wall-mounted thermometer for easy temperature monitoring. Preprogrammed digital controller features auto-defrost function.

XUC SERIES - UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from 33°F - 40°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-de-frost function
- 115V; 1/5hp



★ Conforms to UL & NSF-7 Standards

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-48R-HC	2	2	47 1/4 1200	29 1/2 750	35 1/4 895	12 338	1/5	115/60/1	2.7	5-15P 

XUC Series

Undercounter Refrigerator

MODELS #XUC-48R-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	47¼"W x 29½"D x 35¼"H
Interior Dimensions	42½"W x 22⅞"D x 23½"H
Working Height	35¼"
Net Volume	12 cu. ft.
Net Weight	214 lb.
Gross Weight	275 lb.
Packaging Dimensions	50"W x 32¼"D x 38½"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Construction


Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 20⅓⁄₁₆" x 17⅙"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical


Voltage	115
Amps	2.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW



FRONT VIEW

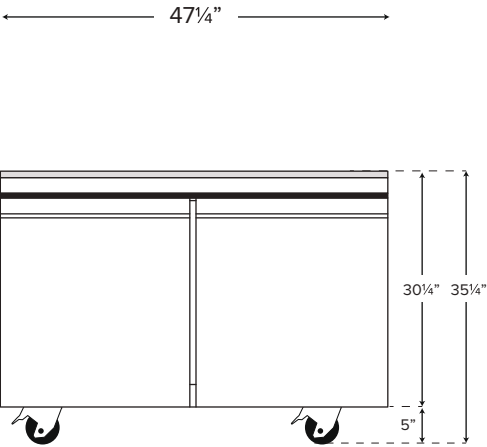

SIDE VIEW

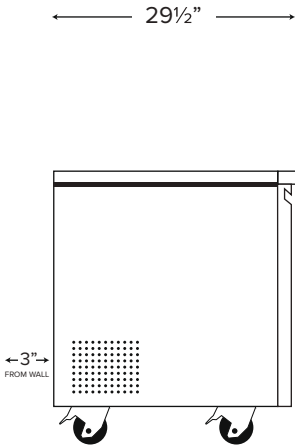

TOP VIEW

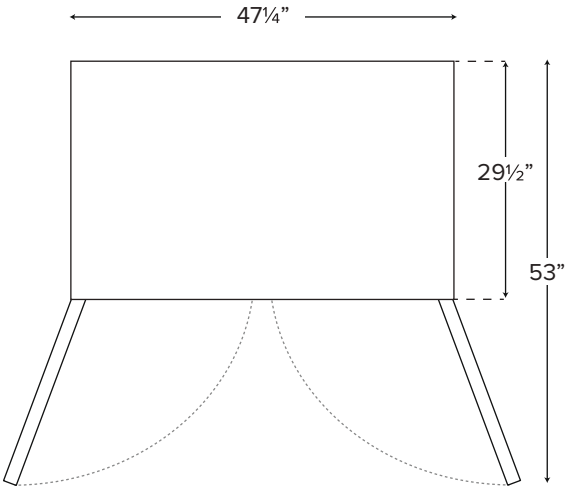

NEMA 5-15P

XUC Series Undercounter Refrigerator

MODELS #XUC-72R-HC

Xiltek

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing. 3 doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

3 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

XUC SERIES - UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperatures from 33°F - 40°F
- Three epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-de-frost function
- 115V; 1/5 hp



★ Conforms to UL & NSF-7 Standards

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			CAP. CU.FT. LITER	HP	Voltage	Amps	NEMA Config.
			L	D	H					
XUC-72R-HC	3	3	72 1829	29 1/2 750	35 1/4 895	15.5 440	1/5	115/60/1	3.2	5-15P 

XUC Series

Undercounter Refrigerator

MODELS #XUC-72R-HC



TECHNICAL DATA

Dimensions

Exterior Dimensions	71½"W x 29½"D x 35¼"H
Interior Dimensions	66⅞"W x 22⅞"D x 23½"H
Working Height	35¼"
Net Volume	16.9 cu. ft.
Net Weight	298 lb.
Gross Weight	370 lb.
Packaging Dimensions	74¼"W x 32¼"D x 38½"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in -place polyurethane
Shelf Size	(2) 20⅓⁄₁₆" x 17⅙⁄₁₆" + (1) 17⅙⁄₁₆" x 23½"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

Electrical

Voltage	115
Amps	3.2
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

PLAN VIEW

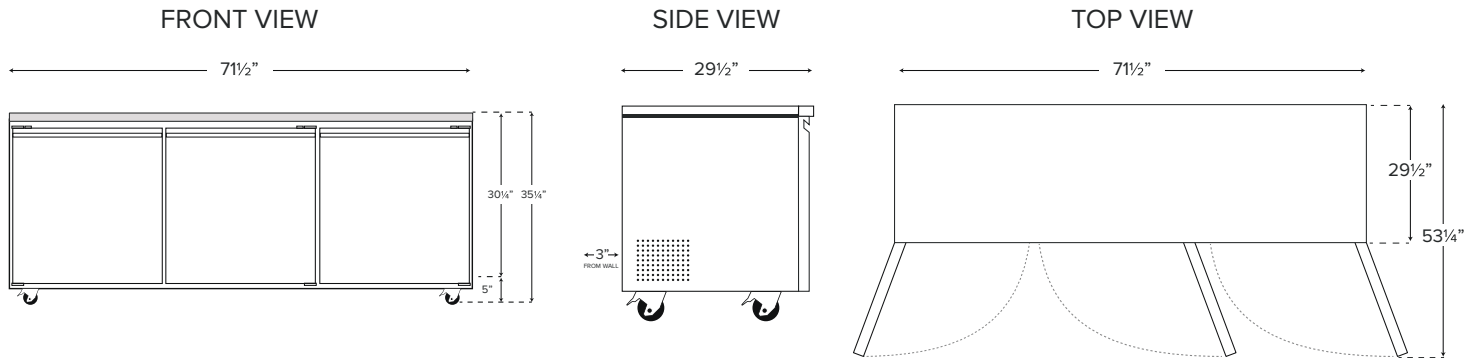

NEMA 5-15P

Xiltek

www.xiltek.com

info@xiltek.com

(602)800-8884

